


Točivá příruba PN 10  
vrtaná, redukováná síla  
podobná DIN 2642/ EN 1092-1

[zkratka označení: LF-R\\*](#)

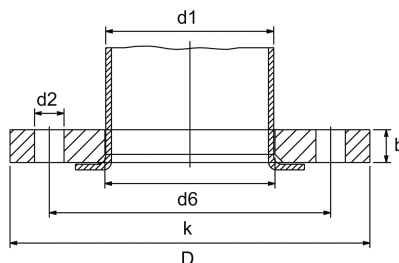

### technický list výrobku

Řeše	DN	d1	b	d6	D	k	d2	Anz	RG	Art.-Nr.
ISO	20	26,9	10	30	105	75	14	4	M12	LF-026-R10
ISO	25	33,7	10	36	115	85	14	4	M12	LF-033-R10
ISO	32	42,4	10	46	140	100	18	4	M16	LF-042-R10
ISO	40	48,3	10	54	150	110	18	4	M16	LF-048-R10
ISO	40	48,3	15	54	150	110	18	4	M16	LF-048-R15
ISO	50	60,3	10	65	165	125	18	4	M16	LF-060-R10
ISO	50	60,3	15	65	165	125	18	4	M16	LF-060-R15
ISO	65	76,1	10	81	185	145	18	4	M16	LF-076-R10
ISO	65	76,1	15	81	185	145	18	4	M16	LF-076-R15
ISO	80	88,9	10	94	200	160	18	8	M16	LF-088-R10
ISO	80	88,9	15	94	200	160	18	8	M16	LF-088-R15
ISO	100	114,3	10	119	220	180	18	8	M16	LF-114-R10
ISO	100	114,3	15	119	220	180	18	8	M16	LF-114-R15
ISO	125	139,7	12	145	250	210	18	8	M16	LF-139-R12
ISO	150	168,3	12	173	285	240	22	8	M20	LF-168-R12
ISO	150	168,3	15	173	285	240	22	8	M20	LF-168-R15
ISO	200	219,1	12	225	340	295	22	8	M20	LF-219-R12
ISO	200	219,1	15	225	340	295	22	8	M20	LF-219-R15
ISO	250	273,0	15	279	395	350	22	12	M20	LF-273-R15
ISO	250	273,0	20	279	395	350	22	12	M20	LF-273-R20
ISO	300	323,9	15	329	445	400	22	12	M20	LF-323-R15
ISO	300	323,9	20	329	445	400	22	12	M20	LF-323-R20
ISO	350	355,6	15	362	505	460	22	16	M20	LF-355-R15
ISO	350	355,6	20	362	505	460	22	16	M20	LF-355-R20
ISO	400	406,4	15	413	565	515	26	16	M24	LF-406-R15
ISO	400	406,4	20	413	565	515	26	16	M24	LF-406-R20
ISO	450	457,2	15	467	615	565	26	20	M24	LF-457-R15
ISO	450	457,2	20	467	615	565	26	20	M24	LF-457-R20
ISO	500	508,0	15	517	670	620	26	20	M24	LF-508-R15
ISO	500	508,0	20	517	670	620	26	20	M24	LF-508-R20
ISO	600	610,0	15	618	780	725	30	20	M27	LF-610-R15
ISO	600	610,0	20	618	780	725	30	20	M27	LF-610-R20
ISO	700	711,2	20	721	895	840	30	24	M27	LF-711-R20
ISO	700	711,2	25	721	895	840	30	24	M27	LF-711-R25
ISO	800	813,0	25	824	1015	950	33	24	M30	LF-813-R25
ISO	800	813,0	30	824	1015	950	33	24	M30	LF-813-R30

Reihe	DN	d1	b	d6	D	k	d2	Anz	RG	Art.-Nr.
Metric	50	54,0	10	59	165	125	18	4	M16	LF-054-R10
Metric	65	69,0	10	74	185	145	18	4	M16	LF-069-R10
Metric	65	70,0	10	75	185	145	18	4	M16	LF-070-R10
Metric	80	84,0	10	89	200	160	18	8	M16	LF-084-R10
Metric	100	104,0	15	109	220	180	18	8	M16	LF-104-R15
Metric	125	129,0	15	134	250	210	18	8	M16	LF-129-R15
Metric	150	154,0	15	159	285	240	22	8	M20	LF-154-R15
Metric	200	204,0	15	210	340	295	22	8	M20	LF-204-R15
Metric	250	254,0	15	260	395	350	22	12	M20	LF-254-R15
Metric	300	306,0	20	315	445	400	22	12	M20	LF-306-R20
Metric	600	608,0	20	614	780	725	30	20	M27	LF-608-R20
DIN	40	44,5	10	50	150	110	18	4	M16	LF-044-R10
DIN	100	108,0	10	113	220	180	18	8	M16	LF-108-R10
DIN	150	159,0	15	164	285	240	22	8	M20	LF-159-R15

dostupné jakosti: 1.4571, 304L, 316L

Příruby > Točivé příruby > redukováná síla > vrtaná PN 10