
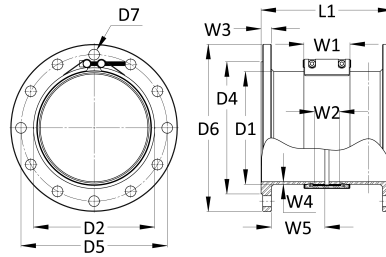


dismantling joint

[short name: TKPS\\*](#)




[technical product sheet](#)

Abm.	Art.-Nr.
48,3 - 2000 mm	TKPS-48-2000

available material: ask

Systems > TEEKAY > installation > adapters > dismantling joints

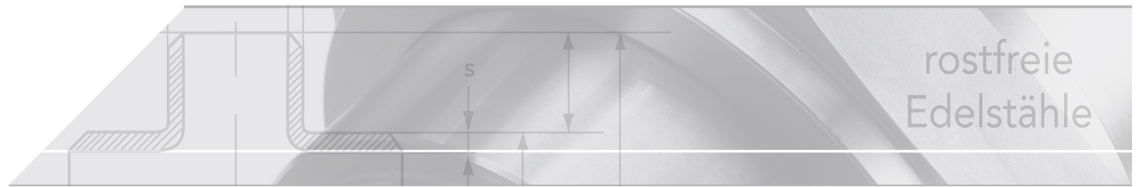

## Applications

Teekay Dismantling Joints facilitate the easy access and removal of equipment when it comes to long-term maintenance of piping systems. Rather than moving large sections of fixed pipework, use the Dismantling Joint to create space and easy access to pumps, valves and flowmeters.

Teekay Dismantling Joints enable up to 100mm of longitudinal adjustment. Each joint comes with a Teekay Axiflex coupling and axial restraint is provided by the high tensile steel tie bars.

## Material Selections

Type	Casing	Coated	Fasteners
Type I	AISI 304/ 1.4301	-	Alloy steel, PTFE coated
Type II	AISI 304/ 1.4301	-	AISI 316/ 316L
Type IV	AISI 316L/ 1.4404	-	AISI 316/ 316L
Type V	High strength steel	Rilsan/ PVC/ Epoxy	Alloy steel, PTFE coated
Type VI	High strength steel	Rilsan/ PVC/ Epoxy	AISI 316/ 316L

## Temperature

Gasket	Temperature
EPDM	-20°C to +100°C
NBR	-20°C to +80°C
HNBR	-20°C to +150°C
FKM	-20°C to +180°C

