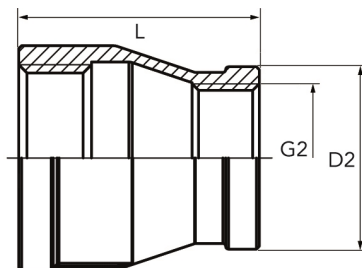


reducing socket - ISO 4144

[short name: RM.I\\*](#)


## technical product sheet

G	G2	L	D	D2	Art.-Nr.
1/4"	1/8"	26	19,0	15,0	RM-014-018
3/8"	1/8"	28	23,0	15,0	RM-038-018
3/8"	1/4"	29	23,0	22,0	RM-038-014
1/2"	1/8"	34	29,0	15,0	RM-012-018
1/2"	1/4"	34	27,0	23,0	RM-012-014
1/2"	3/8"	34	27,0	23,0	RM-012-038
3/4"	1/4"	38	35,0	22,0	RM-034-014
3/4"	3/8"	37	33,0	23,0	RM-034-038
3/4"	1/2"	37	33,0	29,0	RM-034-012
1"	1/4"	42	43,0	22,0	RM-100-014
1"	3/8"	42	44,0	23,0	RM-100-038
1"	1/2"	42	40,0	29,0	RM-100-012
1"	3/4"	42	40,0	32,0	RM-100-034
1 1/4"	1/2"	48	53,0	29,0	RM-114-012
1 1/4"	3/4"	48	50,0	33,0	RM-114-034
1 1/4"	1"	49	50,0	40,0	RM-114-100
1 1/2"	1/2"	51	56,5	29,0	RM-112-012
1 1/2"	3/4"	53	59,0	36,0	RM-112-034
1 1/2"	1"	53	56,5	40,0	RM-112-100
1 1/2"	1 1/4"	53	56,5	40,0	RM-112-114
2"	1/2"	51	72,0	29,0	RM-200-012
2"	3/4"	51	72,0	36,0	RM-200-034
2"	1"	56	72,0	40,0	RM-200-100
2"	1 1/4"	59	70,0	50,0	RM-200-114
2"	1 1/2"	59	72,0	56,5	RM-200-112
2 1/2"	1"	60	85,0	44,0	RM-212-100
2 1/2"	1 1/4"	60	85,0	50,0	RM-212-114
2 1/2"	1 1/2"	60	85,0	56,5	RM-212-112
2 1/2"	2"	61	85,0	72,0	RM-212-200
3"	1 1/2"	62	100,0	56,5	RM-300-112
3"	2"	62	100,0	72,0	RM-300-200
3"	2 1/2"	62	100,0	85,0	RM-300-212
4"	2"	65	128,0	72,0	RM-400-200
4"	2 1/2"	65	128,0	85,0	RM-400-212
4"	3"	65	128,0	100,0	RM-400-300

available material: 1.4408

created 22.04.2024 00:25

G	G2	L	D	D2	Art.-Nr.
---	----	---	---	----	----------

Threaded fittings > fittings > PN 16/ 20 (ISO 4144) > reducers > F x F



## Reducing socket

made of stainless steel

### Version

standard according to ISO 4144

material AISI 316 / 1.4407 (V4A)

inspection certificate (APZ) according to DIN EN 10204-3.1

female thread cylindrical according to ISO 228-1 (Code G)

### Design

Temperature*	Pressure**
-20 to 40 °C	20 bar
100 °C	16 bar
150 °C	15 bar
200 °C	14 bar
220 °C	13 bar

\* of the medium

\*\* max. vibration-free operating pressure