


tee branch female outlet
press fitting, M profile

[short name: N.12*](#)




technical product sheet

DW	Abnahme	Rohr-AD	Rp	L	l	h	h2
EPDM	DVGW	15,0	1/2"	64	12	36,0	23,0
EPDM	DVGW	18,0	1/2"	68	14	37,0	24,0
EPDM	DVGW	18,0	3/4"	68	14	41,0	26,0
EPDM	DVGW	22,0	1/2"	75	16	39,0	26,0
EPDM	DVGW	22,0	3/4"	75	16	44,0	29,0
EPDM	DVGW	28,0	1/2"	82	19	42,0	29,0
EPDM	DVGW	28,0	3/4"	82	19	46,0	31,0
EPDM	DVGW	28,0	1"	82	19	30,0	47,0
EPDM	DVGW	35,0	1/2"	100	24	45,0	32,0
EPDM	DVGW	35,0	3/4"	100	24	50,0	35,0
EPDM	DVGW	35,0	1"	100	24	51,0	34,0
EPDM	DVGW	35,0	1 1/4"	100	24	55,0	36,0
EPDM	DVGW	42,0	1/2"	114	27	48,0	35,0
EPDM	DVGW	42,0	3/4"	114	27	52,0	37,0
EPDM	DVGW	42,0	1"	114	27	53,0	34,0
EPDM	DVGW	42,0	1 1/2"	114	27	61,0	42,0
EPDM	DVGW	54,0	1/2"	136	34	55,0	41,0
EPDM	DVGW	54,0	3/4"	136	34	58,0	43,0
EPDM	DVGW	54,0	1"	136	34	59,0	41,0
EPDM	DVGW	54,0	2"	136	34	76,0	47,0
EPDM	DVGW	76,1	3/4"	226	59	71,0	56,0
EPDM	DVGW	76,1	2"	226	59	91,0	62,0
EPDM	DVGW	88,9	3/4"	256	70	78,0	63,0
EPDM	DVGW	88,9	1"	256	70	77,0	59,0
EPDM	DVGW	88,9	2"	256	70	97,0	68,0
EPDM	DVGW	108,0	3/4"	300	81	87,0	72,0
EPDM	DVGW	108,0	2"	300	81	107,0	78,0
EPDM	DVGW	139,7	1/2"	394	99	100,5	87,5
EPDM	DVGW	139,7	3/4"	394	99	105,5	90,5
EPDM	DVGW	139,7	2"	394	99	123,0	94,0
EPDM	DVGW	168,3	3/4"	514	139	120,0	105,0
EPDM	DVGW	168,3	2"	514	139	138,0	109,0
FKM	-	15,0	1/2"	64	12	36,0	23,0
FKM	-	18,0	1/2"	68	14	37,0	24,0
FKM	-	18,0	3/4"	68	14	41,0	26,0
FKM	-	22,0	1/2"	75	16	39,0	26,0

DW	Abnahme	Rohr-AD	Rp	L	l	h	h2
FKM	-	22,0	3/4"	75	16	44,0	29,0
FKM	-	28,0	1/2"	82	19	42,0	29,0
FKM	-	28,0	3/4"	82	19	46,0	31,0
FKM	-	28,0	1"	82	19	30,0	47,0
FKM	-	35,0	1/2"	100	24	45,0	32,0
FKM	-	35,0	3/4"	100	24	50,0	35,0
FKM	-	35,0	1"	100	24	51,0	34,0
FKM	-	35,0	1 1/4"	100	24	55,0	36,0
FKM	-	42,0	1/2"	114	27	48,0	35,0
FKM	-	42,0	3/4"	114	27	52,0	37,0
FKM	-	42,0	1"	114	27	53,0	34,0
FKM	-	42,0	1 1/2"	114	27	61,0	42,0
FKM	-	54,0	1/2"	136	34	55,0	41,0
FKM	-	54,0	3/4"	136	34	58,0	43,0
FKM	-	54,0	1"	136	34	59,0	41,0
FKM	-	54,0	2"	136	34	76,0	47,0
FKM	-	76,1	3/4"	226	59	71,0	56,0
FKM	-	76,1	2"	226	59	91,0	62,0
FKM	-	88,9	3/4"	256	70	78,0	63,0
FKM	-	88,9	2"	256	70	97,0	68,0
FKM	-	108,0	3/4"	300	81	87,0	72,0
FKM	-	108,0	2"	300	81	107,0	78,0

available material: 316L

Systeme > Pressfittings > T-Stücke > mit Muffenabgang

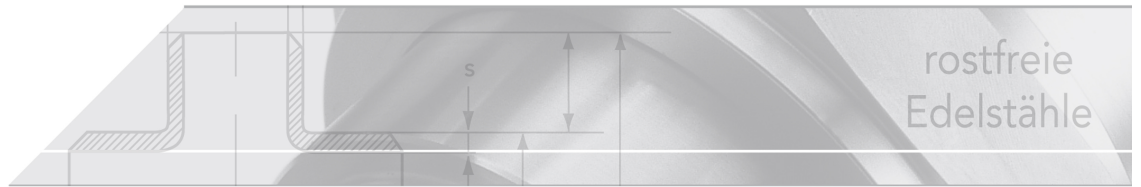

NUMEPRESS

Stainless steel press-system

Properties

Unsolvable press connection acc. to EN 10088

M profile, system independent

Nominal pressure for water applications max. 16 bar

Stainless steel 1.4404 (AISI 316L)

Female thread acc. to DIN EN 10226

DVGW-approval for water

ÖVGW-certificate for water installations

SVGW SSIGE - certificate for water distribution systems

FM APPROVED

Gaskets

Material	Colour	Application	Temperature
EPDM	black	water	-20° - +110° C
FKM	green	solar, oil, compressed ai	-30° - +180° C
FPM	red	steam	-20° - +200° C

