


Rohrschelle, 1-teilig  
einlaschig  
mit Anzugsmöglichkeit

[Kurzbezeichnung: 1592\\*](#)

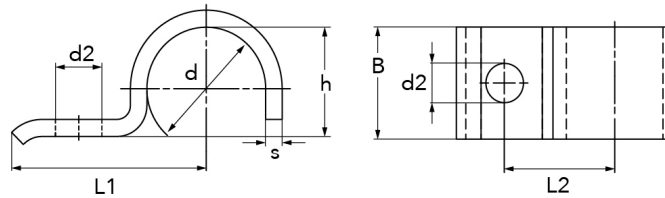

### Technisches Produktblatt

| Ausf   | Norm     | d    | Rohr-AD | d2   | h  | L1 | L2 | B  | s |
|--------|----------|------|---------|------|----|----|----|----|---|
| leicht | DIN 1596 | 7,0  | 5,5-7   | 6,6  | 5  | 26 | 14 | 16 | 2 |
| leicht | DIN 1596 | 9,0  | 7-9     | 6,6  | 6  | 28 | 16 | 16 | 2 |
| leicht | DIN 1596 | 13,0 | 9,5-13  | 6,6  | 9  | 30 | 18 | 20 | 2 |
| leicht | DIN 1596 | 15,0 | 13-15,5 | 6,6  | 12 | 32 | 20 | 20 | 2 |
| leicht | DIN 1596 | 19,0 | 15,5-19 | 6,6  | 15 | 34 | 22 | 20 | 2 |
| leicht | DIN 1596 | 23,0 | 20-23   | 9,0  | 19 | 43 | 28 | 25 | 3 |
| leicht | DIN 1596 | 26,0 | 23-26   | 9,0  | 22 | 44 | 29 | 25 | 3 |
| leicht | DIN 1596 | 28,0 | 26-28,5 | 9,0  | 24 | 47 | 32 | 25 | 3 |
| leicht | DIN 1596 | 31,0 | 28,5-31 | 9,0  | 27 | 47 | 32 | 25 | 3 |
| leicht | DIN 1596 | 33,0 | 31-33   | 9,0  | 29 | 56 | 36 | 25 | 3 |
| leicht | DIN 1596 | 36,0 | 33-36   | 11,0 | 32 | 57 | 40 | 30 | 3 |
| leicht | DIN 1596 | 39,0 | 36-39   | 11,0 | 34 | 59 | 42 | 30 | 3 |
| leicht | DIN 1596 | 43,0 | 39-43   | 11,0 | 38 | 61 | 44 | 30 | 3 |
| leicht | DIN 1596 | 46,0 | 43-46   | 11,0 | 41 | 62 | 45 | 30 | 3 |
| leicht | DIN 1596 | 49,0 | 46-49   | 14,0 | 44 | 67 | 48 | 40 | 4 |
| leicht | DIN 1596 | 52,0 | 49-52   | 14,0 | 47 | 72 | 53 | 40 | 4 |
| leicht | DIN 1596 | 58,0 | 53-58   | 14,0 | 52 | 74 | 55 | 40 | 4 |
| leicht | DIN 1596 | 61,0 | 58-61   | 14,0 | 56 | 77 | 58 | 40 | 4 |
| schwer | DIN 1592 | 7,0  | 5,5-7   | 6,6  | 5  | 22 | 14 | 16 | 2 |
| schwer | DIN 1592 | 9,0  | 7-9     | 6,6  | 6  | 27 | 18 | 20 | 2 |
| schwer | DIN 1592 | 13,0 | 9,5-13  | 11,0 | 9  | 40 | 25 | 25 | 3 |
| schwer | DIN 1592 | 15,5 | 13-15,5 | 11,0 | 12 | 41 | 26 | 25 | 3 |
| schwer | DIN 1592 | 19,0 | 15,5-19 | 11,0 | 15 | 43 | 28 | 25 | 3 |
| schwer | DIN 1592 | 23,0 | 20-23   | 14,0 | 19 | 51 | 35 | 30 | 5 |
| schwer | DIN 1592 | 26,0 | 23-26   | 14,0 | 22 | 52 | 36 | 30 | 5 |
| schwer | DIN 1592 | 28,5 | 26-28,5 | 14,0 | 24 | 53 | 37 | 30 | 5 |
| schwer | DIN 1592 | 31,0 | 28,5-31 | 14,0 | 27 | 55 | 39 | 30 | 5 |
| schwer | DIN 1592 | 36,0 | 33-36   | 14,0 | 32 | 57 | 41 | 40 | 5 |
| schwer | DIN 1592 | 39,0 | 36-39   | 14,0 | 34 | 59 | 43 | 40 | 5 |
| schwer | DIN 1592 | 43,0 | 39-43   | 18,0 | 38 | 68 | 48 | 40 | 5 |
| schwer | DIN 1592 | 46,0 | 43-46   | 18,0 | 41 | 70 | 50 | 40 | 5 |
| schwer | DIN 1592 | 49,0 | 46-49   | 18,0 | 44 | 73 | 53 | 40 | 8 |
| schwer | DIN 1592 | 52,0 | 49-52   | 18,0 | 47 | 76 | 56 | 40 | 8 |
| schwer | DIN 1592 | 58,0 | 53-58   | 18,0 | 52 | 78 | 58 | 40 | 8 |
| schwer | DIN 1592 | 61,0 | 58-61   | 18,0 | 57 | 80 | 60 | 40 | 8 |

Verfügbare Werkstoffe: 1.4301, V4A

Montagematerial > Rohrschellen > einteilige ... > einlaschig

\*Tipp: Die Eingabe der [Kurzbezeichnung](#) in das Suchfeld auf unserer Website ermöglicht Ihnen den Direktaufruf einer Artikelgruppe. Alternativ [hier klicken](#)