


blind flange

[short name: BF.G\\*](#)

pressed from sheet

based on EN 1092-1 type 05

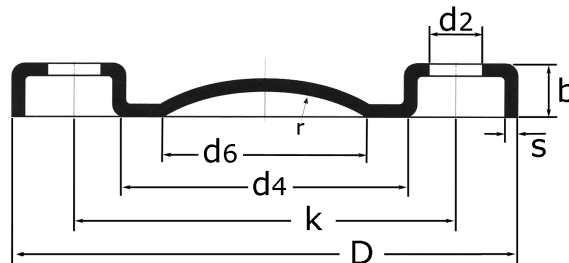

### technical product sheet

DN	D	d4	d6	k	s	b	d2	Anz	PN	kg	Art.-Nr.
15	95	40,0	22,0	65	3,0	9,5	13,5	4	10	0,000	BF-015-GPR
20	105	48,0	28,0	75	3,0	12,5	13,5	4	10	0,000	BF-020-GPR
25	115	55,0	35,0	85	4,0	13,0	13,5	4	10	0,342	BF-025-GPR
32	140	65,0	45,0	100	5,0	14,5	17,5	4	10	0,000	BF-032-GPR
40	150	74,0	54,0	110	5,0	15,5	17,5	4	10	0,945	BF-040-GPR
50	165	88,0	68,0	125	5,0	17,0	17,5	4	10	1,399	BF-050-GPR
65	185	104,0	84,0	145	6,0	18,0	17,5	4	10	1,720	BF-065-GPR
80	200	118,0	98,0	160	6,0	18,5	17,5	8	10	2,020	BF-080-GPR
100	220	137,0	117,0	180	6,0	20,5	17,5	8	10	2,480	BF-100-GPR
125	250	161,0	141,0	210	6,0	21,0	17,5	8	10	3,200	BF-125-GPR
150	285	194,5	174,5	240	6,0	27,0	21,5	8	10	4,093	BF-150-GPR
200	340	246,5	226,5	295	8,0	31,0	21,5	8	10	5,080	BF-200-GPR

available material: ask

Flanges > blind flanges > pressed from sheet