steel mounting bracket

galvanized

bottom closed

for mounting of actuators

short name: AZMB*



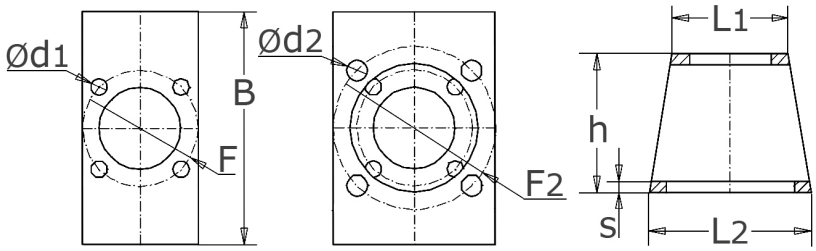

technical product sheet

F	F2	B	L1	L2	h	s	d1	d2	kg	Art.-Nr.
F03	F03	80	35	35	40	4	5,5	5,5	0,000	AZMB-03X03-G-V
F03	F03	80	35	50	60	4	5,5	5,5	0,000	AZMB-03X03-G-V-H
F03	F04	80	35	50	60	4	5,5	5,5	0,000	AZMB-03X04-G-V
F03	F05	80	35	55	60	4	5,5	6,5	0,000	AZMB-03X05-G-V
F03	F05	100	35	55	60	5	5,5	6,5	0,000	AZMB-03X05-G-V-B
F03	F07	100	35	73	60	5	5,5	8,5	0,000	AZMB-03X07-G-V
F04	F04	80	50	50	60	4	5,5	5,5	0,000	AZMB-04X04-G-V
F04	F05	80	50	55	60	4	5,5	6,5	0,000	AZMB-04X05-G-V
F04	F05	100	50	55	60	5	5,5	6,5	0,000	AZMB-04X05-G-V-B
F04	F07	100	50	73	60	5	5,5	8,5	0,000	AZMB-04X07-G-V
F05	F05	80	55	55	60	4	6,5	5,5	0,000	AZMB-05X05-G-V
F05	F05	100	55	55	60	5	6,5	6,5	0,362	AZMB-05X05-G-V-B
F05	F07	100	55	73	60	5	6,5	8,5	0,541	AZMB-05X07-G-V
F05	F10	120	55	95	80	5	6,5	10,5	0,598	AZMB-05X10-G-V
F05	F10	140	55	95	80	6	6,5	10,5	0,000	AZMB-05X10-G-V-B
F05	F12	140	55	120	80	6	6,5	13,0	0,000	AZMB-05X12-G-V
F07	F07	100	73	73	60	5	8,5	8,5	0,562	AZMB-07X07-G-V
F07	F10	120	73	95	80	5	8,5	10,5	0,000	AZMB-07X10-G-V
F07	F10	140	73	95	80	6	8,5	10,5	0,000	AZMB-07X10-G-V-B
F07	F12	140	73	120	80	6	8,5	13,0	0,000	AZMB-07X12-G-V
F07	F14	160	73	135	90	6	8,5	17,0	0,000	AZMB-07X14-G-V
F10	F10	120	95	95	80	5	10,5	10,5	0,000	AZMB-10X10-G-V
F10	F10	140	95	95	80	6	10,5	10,5	0,000	AZMB-10X10-G-V-B
F10	F12	140	95	120	80	6	10,5	13,0	0,000	AZMB-10X12-G-V
F10	F14	160	95	135	90	6	10,5	17,0	0,000	AZMB-10X14-G-V
F10	F16	220	95	160	120	8	10,5	21,0	0,000	AZMB-10X16-G-V
F12	F12	140	120	120	80	6	13,0	13,0	0,000	AZMB-12X12-G-V
F12	F14	160	120	135	90	6	13,0	17,0	2,062	AZMB-12X14-G-V
F12	F16	220	120	160	120	8	13,0	21,0	0,000	AZMB-12X16-G-V
F12	F25	320	120	300	180	10	13,0	18,0	0,000	AZMB-12X25-G-V
F14	F14	160	135	135	90	6	17,0	17,0	0,000	AZMB-14X14-G-V
F14	F16	220	135	160	120	8	17,0	21,0	0,000	AZMB-14X16-G-V
F14	F25	320	135	300	180	10	17,0	18,0	0,000	AZMB-14X25-G-V
F16	F16	220	160	160	120	6	21,0	21,0	0,000	AZMB-16X16-G-V
F16	F25	320	160	300	180	10	21,0	18,0	0,000	AZMB-16X25-G-V
F25	F25	320	300	300	180	10	18,0	18,0	0,000	AZMB-25X25-G-V

F	F2	B	L1	L2	h	s	d1	d2	kg	Art.-Nr.
F25	F30	400	300	320	200	12	18,0	21,0	0,000	AZMB-25X30-G-V
F30	F30	400	320	320	200	12	21,0	21,0	0,000	AZMB-30X30-G-V

available material: ask

Industrial valves › ball valves › with actuator › pneumatic › accessories › mounting brackets › closed › galvanized

full description:

steel mounting bracket
galvanized
bottom closed
for mounting of actuators
for high stress

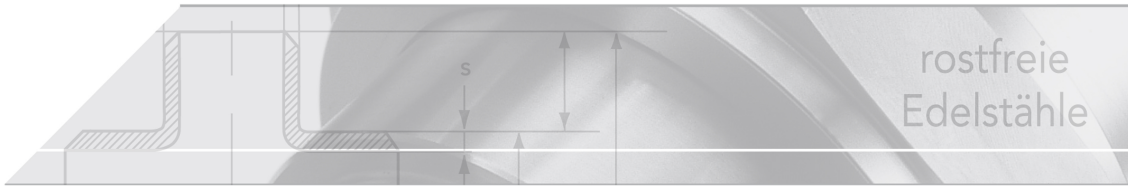

Comparison of the dimensions of the circular hole patterns

Circular hole pattern	Hole spacing	Ø hole
F 03	25	5,5
F 04	30	5,5
F 05	35	6,5
F 07	55	8,5
F 10	70	10,5
F 12	85	13
F 14	100	17
F 16	130	21
F 25	200	18
F 30	230	21

Specifications in mm