


Stainless steel panel
with access
on side and M4 thread
for the setup of position

[short name: AZKO*](#)

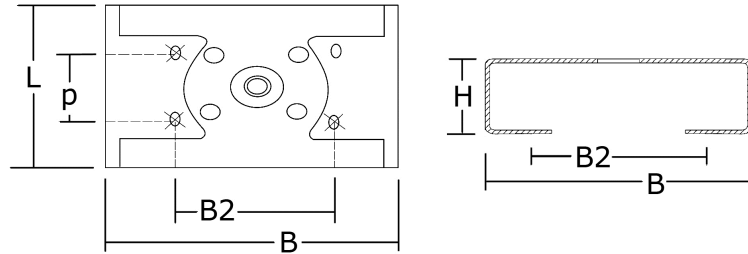


technical product sheet

| F | h | B | B2 | L | H | p | kg | Art.-Nr. |
|-----|----|-----|-----|----|----|----|-------|------------------|
| F05 | 20 | 130 | 80 | 80 | 45 | 30 | 0,254 | AZKO-80X30-20-E |
| F05 | 30 | 130 | 80 | 80 | 55 | 30 | 0,000 | AZKO-80X30-30-E |
| F05 | 30 | 170 | 130 | 80 | 55 | 30 | 0,000 | AZKO-130X30-30-E |
| F05 | 50 | 170 | 130 | 80 | 75 | 30 | 0,000 | AZKO-130X30-50-E |

available material: ask

Industrial valves > ball valves > with actuator > pneumatic > accessories > brackets > with override

full description: Stainless steel panel
with access
on side and M4 thread
for the setup of position
controllers or position feedback
units on actuators
acc. to VDI/VDE 3845 - ISO 5211

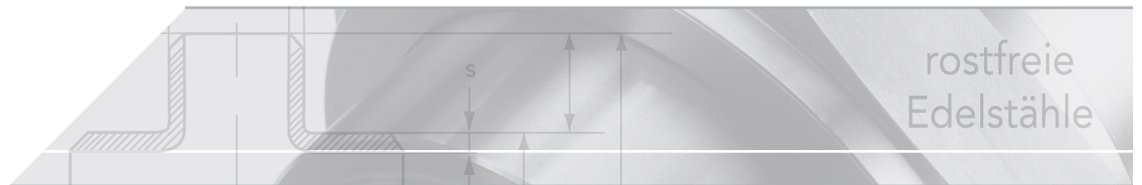

Comparison of the dimensions of the circular hole patterns

| Circular hole pattern | Hole spacing | Ø hole |
|-----------------------|--------------|--------|
| F 03 | 25 | 5,5 |
| F 04 | 30 | 5,5 |
| F 05 | 35 | 6,5 |
| F 07 | 55 | 8,5 |
| F 10 | 70 | 10,5 |
| F 12 | 85 | 13 |
| F 14 | 100 | 17 |
| F 16 | 130 | 21 |
| F 25 | 200 | 18 |
| F 30 | 230 | 21 |

Specifications in mm