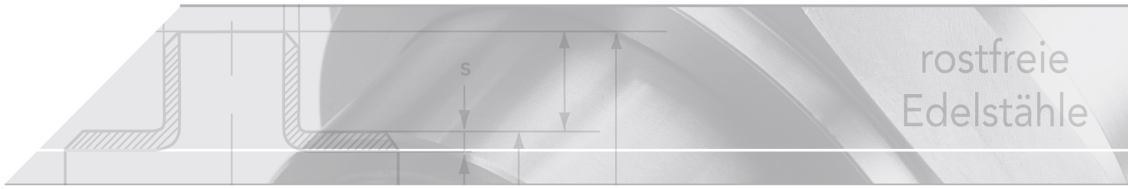

TC-connector

short name: TCVS*

clamp ferrule on both sides
acc. DIN 32676



technical product sheet

Reihe	d3	DN	D	s	L
Reihe A	34	20	23,0	1,5	60
Reihe A	34	20	23,0	1,5	100
Reihe A	50,5	25	29,0	1,5	50
Reihe A	50,5	25	29,0	1,5	70
Reihe A	50,5	25	29,0	1,5	75
Reihe A	50,5	25	29,0	1,5	100
Reihe A	50,5	25	29,0	1,5	150
Reihe A	50,5	25	29,0	1,5	200
Reihe A	50,5	25	29,0	1,5	500
Reihe A	50,5	40	41,0	1,5	50
Reihe A	50,5	40	41,0	1,5	70
Reihe A	50,5	40	41,0	1,5	100
Reihe A	50,5	40	41,0	1,5	200
Reihe A	50,5	40	41,0	1,5	300
Reihe A	64	50	53,0	1,5	50
Reihe A	64	50	53,0	1,5	60
Reihe A	64	50	53,0	1,5	70
Reihe A	64	50	53,0	1,5	75
Reihe A	64	50	53,0	1,5	80
Reihe A	64	50	53,0	1,5	100
Reihe A	64	50	53,0	1,5	120
Reihe A	64	50	53,0	1,5	200
Reihe A	64	50	53,0	1,5	500
Reihe A	64	50	53,0	1,5	150

available material: ask

Systems › clamp connections › connectors

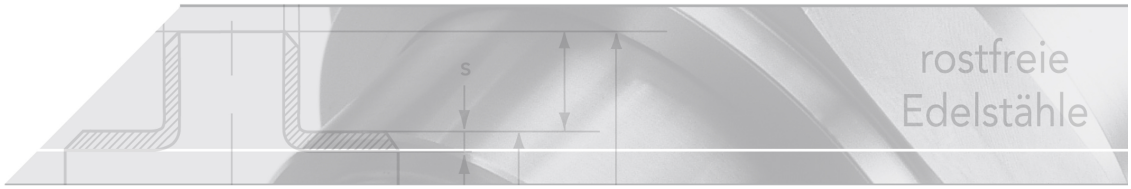

TC connection

Stainless steel construction welded using protective gas, welded, pickled in the dipping bath, and passivated.

Consisting of a longitudinally welded tube acc. to DIN EN 10357 or EN 10217-7

and 2 clamping sockets DIN 32676.

Dimension range

Series A (DIN): DN 10 to DN 200

Series B (ISO): 13,5 to 219,1

Mounting length acc. to your default.