
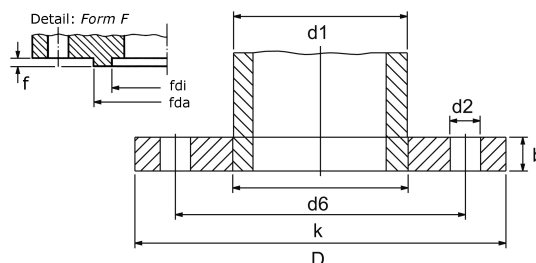


plochá příruba PN 10 s perem

[zkratka označení: GF.F\\*](#)

DIN 2576/ 2512



## technický list výrobku

DN	d1	D	b	d6	k	d2	Anz	f	fda	fdi	Art.-Nr.
10	17,2	90	14	17,7	60	14	4	4,0	34	24	GF-017-F00
15	21,3	95	14	22,0	65	14	4	4,0	39	29	GF-021-F00
20	26,9	150	16	27,6	75	14	4	4,0	50	36	GF-026-F00
25	33,7	115	16	34,4	85	14	4	4,0	57	43	GF-033-F00
32	42,4	140	16	43,1	100	18	4	4,0	65	51	GF-042-F00
40	48,3	150	16	49,0	110	18	4	4,0	75	61	GF-048-F00
50	60,3	150	16	49,0	110	18	4	4,0	87	13	GF-060-F00
50	60,3	165	18	61,1	125	18	4	4,0	87	73	GF-060-F00
65	76,1	185	18	77,1	145	18	4	4,0	109	95	GF-076-F00
80	88,9	200	20	90,3	160	18	8	4,0	120	106	GF-088-F00
100	114,3	220	20	115,9	180	18	8	4,5	149	129	GF-114-F00
125	139,7	250	22	141,6	210	18	8	4,5	175	155	GF-139-F00
150	168,3	285	22	170,5	240	18	8	4,5	203	183	GF-168-F00
200	219,1	340	24	221,8	295	22	8	4,5	259	239	GF-219-F00
250	273,0	395	26	276,2	350	22	12	4,5	312	292	GF-273-F00
300	323,9	445	26	327,6	400	22	12	4,5	363	343	GF-323-F00

dostupné jakosti: na poptávku

Příruby &gt; hladké příruby &gt; DIN / EN &gt; další těsnicí plochy &gt; pero a drážka &gt; DIN 2512 &gt; s perem (PN 10)



### Hladkým příruba PN 10 podle DIN 2576

k navaření

### Těsnicí plocha s pružinou

podle DIN 2512 Typ F

