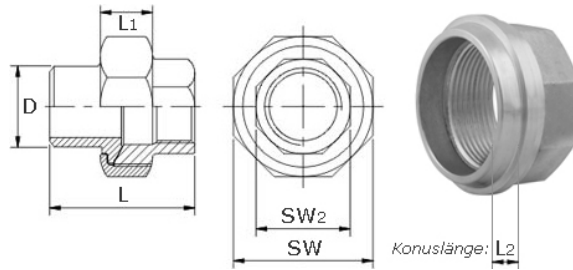


union conical, F/BW


 short name: [VK.IS*](#)


technical product sheet

Rp	D	L	L1	SW	SW2	L2	Art	Fabrikat	kg	Art.-Nr.
1/4"	13,5	37	15	29	19	3,0	ballig		0,084	VK-014-0IS
3/8"	17,2	37	15	34	21	6,0	kon.	TGGL	0,095	VK-038-0IS
1/2"	21,3	34	12	36	24	5,0	kon.	TGGL	0,143	VK-012-0IS
1/2"	21,3	36	14	34	25	4,0	kon.	Haoxing	0,143	VK-012-0IS
3/4"	26,9	38	14	40	29	5,0	kon.	TGGL	0,218	VK-034-0IS
1"	33,7	42	14	49	37	4,0	kon.	BMP	0,289	VK-100-0IS
1 1/4"	42,4	50	20	59	46	6,0	kon.	Valve-tek	0,490	VK-114-0IS
1 1/2"	48,3	51	21	66	52	6,0	kon.	Haoxing	0,465	VK-112-0IS
1 1/2"	48,3	54	18	65	51	7,0	kon.	TGGL	0,465	VK-112-0IS
2"	60,3	55	21	81	65	6,0	kon.	Haoxing	0,835	VK-200-0IS
2"	60,3	57	20	79	64	6,0	kon.	TGGL	0,835	VK-200-0IS
2 1/2"	76,1	67	27	108	85	12,0	kon.		1,453	VK-212-0IS
3"	88,9	69	24	113	93	9,0	kon.	BMP	1,833	VK-300-0IS

available material: V4A

Threaded fittings > unions > conical seat > PN 10 (ECO-Line) > F / BW

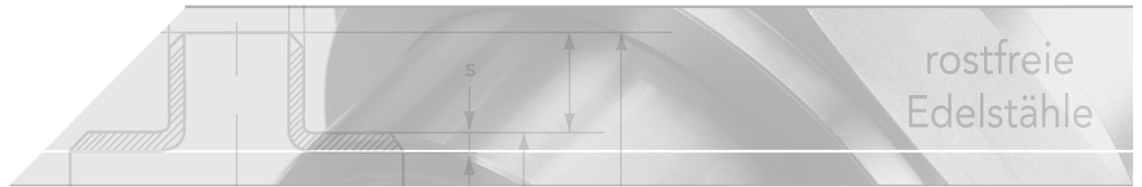

Union F/BW conical sealed made of stainless steel
with inner thread/welding end

Threads:

Whitworth-Pipe threads according to DIN 2999

Type of thread	Version	Code
Inner thread	cylindrical	Rp
Outer thread	tapered	R

Application:

For threaded pipes and fittings, sealed using sealing material in the threads.

Connections sealed in the threads are specified in various national and international standards (ISO 7/1, BS 21, DIN 2999).