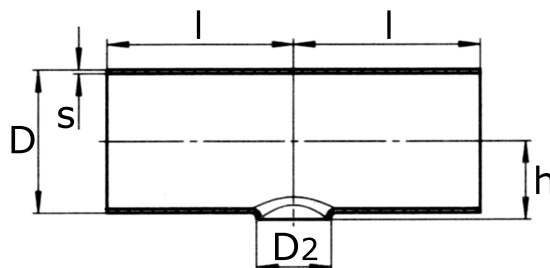



redukováný T-kus krátce vyhrdl

[zkratka označení: RTKA*](#)


technický list výrobku

D	D2	s	L	l	h
54,0	18,0	2,0	114	57,0	30,0
54,0	28,0	2,0	114	57,0	30,0
70,0	43,0	2,0	127	63,5	38,0
70,0	64,0	2,0	127	63,5	38,0
84,0	28,0	2,0	171	85,5	45,0
84,0	43,0	2,0	171	85,5	45,0
84,0	54,0	2,0	171	85,5	45,0
84,0	70,0	2,0	171	85,5	45,0
85,0	54,0	2,0	171	85,5	45,5
85,0	64,0	2,0	171	85,5	45,5
101,6	85,0	2,0	190	95,0	54,0
104,0	44,5	2,0	210	105,0	55,0
104,0	54,0	2,0	210	105,0	55,0
104,0	84,0	2,0	210	105,0	55,0
129,0	54,0	2,0	248	124,0	76,0
129,0	84,0	2,0	248	124,0	76,0
129,0	104,0	2,0	248	124,0	76,0
154,0	53,0	2,0	286	143,0	80,0
154,0	84,0	2,0	286	143,0	80,0
154,0	104,0	2,0	286	143,0	80,0
154,0	129,0	2,0	286	143,0	80,0
204,0	104,0	2,0	356	178,0	105,0
204,0	129,0	2,0	356	178,0	105,0
204,0	154,0	2,0	356	178,0	105,0
254,0	104,0	2,0	432	216,0	130,0
254,0	129,0	2,0	432	216,0	130,0
254,0	154,0	2,0	432	216,0	130,0
304,0	129,0	2,0	508	254,0	155,0

dostupné jakosti: na poptávku

Přivařovací fitinky > T-X-Y-kusy > svařované, s redukcí > DIN EN 10253-3 > krátce vyhrdlené > jiné rozměry



Extended T-Pices from in-house production

> Screw thread optional

>> More Special designs upon request

