


reducer, eccentric
straight, welded
acc. to DIN 10253-3

[short name: REBX*](#)

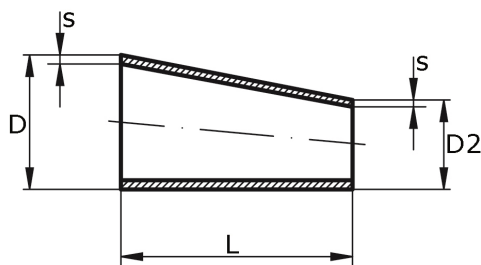

technical product sheet


D	D2	s	L
35,0	28,0	2,0	50
36,0	19,0	2,0	50
36,0	29,0	2,0	64
44,0	19,0	2,0	64
44,0	29,0	2,0	64
44,0	35,0	2,0	64
44,5	28,0	2,0	64
51,0	33,7	2,0	76
51,0	42,4	2,0	76
54,0	23,0	2,0	76
54,0	25,0	2,0	76
54,0	34,0	2,0	76
54,0	44,5	2,0	76
68,0	43,0	1,5	90
69,0	23,0	2,0	90
69,0	35,0	2,0	90
69,0	38,0	2,0	90
69,0	43,0	2,0	90
69,0	44,5	2,0	90
69,0	54,0	2,0	90
70,0	44,5	2,0	90
70,0	54,0	2,0	90
83,0	43,0	1,5	90
83,0	53,0	1,5	90
83,0	68,0	1,5	90
84,0	22,0	2,0	90
84,0	44,5	2,0	90
84,0	54,0	2,0	90
84,0	69,0	2,0	90
104,0	40,0	2,0	100
104,0	54,0	2,0	100
104,0	69,0	2,0	100
104,0	84,0	2,0	100
106,0	57,0	3,0	100
106,0	86,0	3,0	100
108,0	54,0	2,0	100

D	D2	s	L
108,0	57,0	2,0	100
108,0	84,0	2,0	100
129,0	69,0	2,0	127
129,0	84,0	2,0	127
129,0	104,0	2,0	127
133,0	44,5	3,0	127
133,0	108,0	2,5	127
133,0	108,0	5,0	127
154,0	70,0	2,0	140
154,0	84,0	2,0	140
154,0	104,0	2,0	140
154,0	129,0	2,0	140
156,0	70,0	3,0	140
156,0	106,0	3,0	140
156,0	131,0	3,0	140
157,4	104,0	2,0	140
159,0	84,0	3,0	140
159,0	108,0	4,0	140
159,0	133,0	2,0	140
159,0	133,0	3,0	140
204,0	84,0	2,0	152
204,0	104,0	2,0	152
204,0	104,0	3,0	152
204,0	129,0	2,0	152
204,0	133,0	3,0	152
204,0	154,0	2,0	152
204,0	155,0	2,5	152
206,0	104,0	2,0	152
206,0	106,0	3,0	152
206,0	156,0	3,0	152
206,0	159,0	3,0	152
254,0	104,0	2,0	178
254,0	129,0	2,0	178
254,0	154,0	2,0	178
254,0	155,0	2,5	178
254,0	204,0	2,0	178
254,0	204,0	2,5	178
255,0	105,0	2,5	178
255,0	155,0	2,5	178
255,0	205,0	2,5	178
256,0	131,0	3,0	178
256,0	154,0	3,0	178
256,0	156,0	3,0	178
256,0	206,0	3,0	178
258,0	158,0	4,0	178
258,0	208,0	4,0	178
304,0	104,0	2,0	203
304,0	129,0	2,0	203
304,0	154,0	2,0	203
304,0	204,0	2,0	203
304,0	204,0	3,0	203
304,0	254,0	2,0	203
305,0	155,0	2,5	203
305,0	205,0	2,5	203
305,0	255,0	2,5	203
306,0	106,0	3,0	203
306,0	154,0	3,0	203
306,0	156,0	3,0	203

D	D2	s	L
306,0	204,0	3,0	203
306,0	206,0	3,0	203
306,0	254,0	3,0	203
306,0	256,0	3,0	203
308,0	208,0	4,0	203
308,0	258,0	4,0	203
310,0	215,0	4,0	203
354,0	154,0	2,0	330
354,0	254,0	2,0	330
356,0	206,0	3,0	330
356,0	256,0	2,0	330
356,0	256,0	3,0	330
356,0	306,0	3,0	330
360,0	210,0	5,0	330
360,0	260,0	5,0	330
406,0	154,0	3,0	356
410,0	310,0	5,0	356
410,0	360,0	5,0	356
456,0	256,0	3,0	381
456,0	258,0	4,0	381
456,0	356,0	3,0	381
456,0	360,0	3,0	381
458,0	208,0	4,0	381
458,0	306,0	3,0	381
458,0	360,0	4,0	381
460,0	362,0	5,0	381
506,0	256,0	3,0	508
506,0	456,0	3,0	508
508,0	308,0	4,0	508
508,0	358,0	4,0	508
512,0	362,0	6,0	508
512,0	412,0	6,0	508
512,0	462,0	6,0	508
608,0	308,0	4,0	508
608,0	508,0	4,0	508
614,0	414,0	7,0	508
614,0	464,0	7,0	508
808,0	608,0	4,0	610

available material: ask

Butt welding fittings > reducers > welded, eccentric > special versions > other dimentions

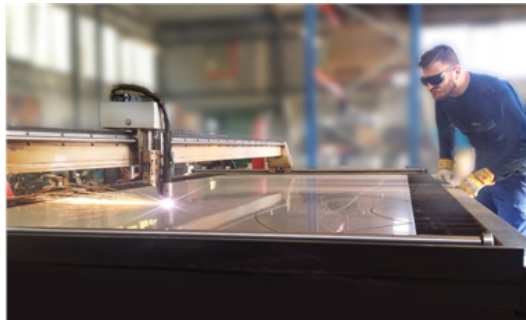

Eccentric reducer

made from sheet

Version

acc. to DIN EN 10253-3

straight, without cylindrical ends

made from sheet

surface pickled

material: 1.4307/304L - 1.4571 - 1.4404/316L

primary material certificate acc. to EN 10204/3.1

from in-house production

