


Sight Glass
for Sanitary clamp fitting

[short name: TCSG*](#)




technical product sheet

d3	D	d	H	bar	Art.-Nr.
34	21,0	12,0	7	25	TCSG-034-6
50,5	41,0	25,0	10	16	TCSG-050-6
64	52,0	30,0	10	16	TCSG-064-6
77,5	69,0	35,0	10	10	TCSG-077-6
91	76,0	40,0	10	10	TCSG-091-6
106	90,0	50,0	10	10	TCSG-106-6
119	100,0	55,0	12	10	TCSG-119-6
183	160,0	80,0	16	6	TCSG-183-6

available material: ask

Systems > clamp connections > further clamp ferrules... > sightglass

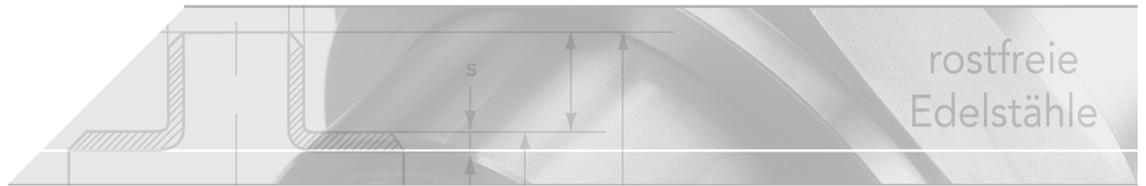

Sight Glass

for Sanitary clamp fitting acc. DIN 32 676 / ISO 2852

Technical data

Pressure equipment directive 97/23/EG 02/98, Module H (DIN/EN ISO 9001)

AD 2000 standards W0/TRD 100

Sight glass fused to metal conforming to DIN 7079

Borosilicat glass to DIN 7080 / DN 7079

Certificate of Conformity to EN 10204-3.1 or 3.2

Ring material

1.4462

Operating temperature

-30°C to +280°C

