



Y-kus

s přivařovacími konci

[zkratka označení: YS.S*](#)


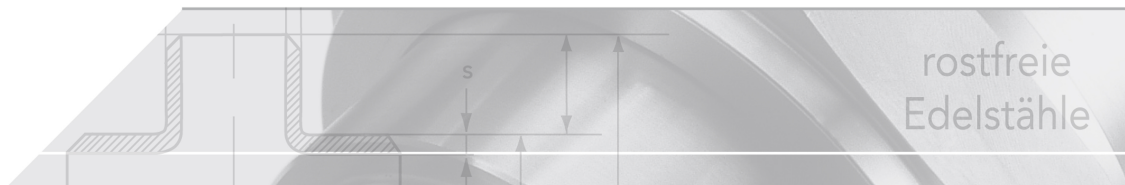
technický list výrobku

D	s	l	kg
21,3	2,0	25	0,060
26,9	2,0	29	0,124
33,7	2,0	38	0,144
42,4	2,0	48	0,301
48,3	2,0	57	0,314
48,3	2,6	57	0,397
60,3	2,0	64	0,434
60,3	2,6	64	0,686
60,3	2,9	64	0,745
76,1	2,0	76	0,665
76,1	2,6	76	0,820
76,1	2,9	76	0,950
88,9	2,0	86	0,860
88,9	2,6	86	1,120
88,9	2,9	86	1,740
108,0	2,0	105	1,180
114,3	2,0	105	1,500
114,3	2,6	105	1,730
114,3	3,0	105	2,228
139,7	2,0	124	1,964
139,7	2,6	124	2,400
139,7	3,0	124	3,000
168,3	2,0	143	2,644
168,3	2,6	143	4,492
168,3	3,0	143	4,050
219,1	2,0	178	4,142
219,1	3,0	178	6,240
273,0	3,0	216	10,400
323,9	3,0	254	13,800
355,6	3,0	279	17,000
406,4	3,0	305	23,000
406,4	4,0	305	0,000

dostupné jakosti: 1.4307, 1.4571

Přivařovací fitinky > T-X-Y-kusy > svařované > Y-kus

vytvořeno 15.03.2025 21:20



Y-piece

with welding-on ends

Version

made of welded tube or made of sheet

welded under inert gas

pickled in dipping bath

material: 1.4307/304L - 1.4571 - 1.4404/316L

certificate primary material acc. to EN 10204/3.1

from in-house production

