


2-piece ball valve F/M
full bore, PN 63
- with locking device -

[short name: K2.IA*](#)




technical product sheet

DN	R	L	l1	d	W	H	Cv	Nm	kg	Art.-Nr.
8	1/4"	57	12,6	11,6	95	51	6,6	4,1	0,186	K2-014-0IA
10	3/8"	58	13,2	11,6	102	48	6,6	4,1	0,180	K2-038-0IA
15	1/2"	69	16,7	15,0	102	52	11,2	5,4	0,273	K2-012-0IA
20	3/4"	78	18,2	20,0	124	61	21,0	7,4	0,420	K2-034-0IA
25	1"	99	21,0	25,0	135	73	35,0	10,4	0,704	K2-100-0IA
32	1 1/4"	112	23,5	32,0	152	79	57,0	13,5	1,060	K2-114-0IA
40	1 1/2"	114	23,5	38,0	152	83	80,0	18,0	1,500	K2-112-0IA
50	2"	140	27,8	50,0	165	99	148,0	25,0	2,440	K2-200-0IA

available material: V4A

Industrial valves > ball valves > threaded ends > 2-piece, full bore > female/ male thread

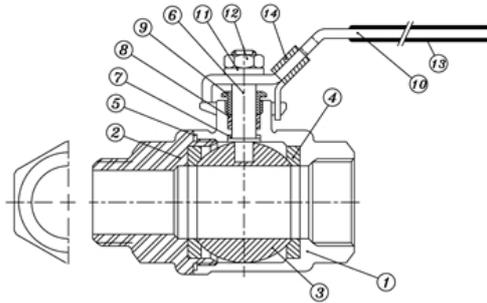

Parts List

No.	Part Name	Material
1.	Housing	V4A (CF8M/ 1.4408)
2.	Threaded flange	V4A (CF8M/ 1.4408)
3.	Ball	V4A (CF8M/ 1.4408)
4.	Ball seal (2x)	PTFE
5.	Housing seal	PTFE
6.	Control shaft	V4A (CF8M/ 1.4408)
7.	Shaft seal	PTFE
8.	Stem packing seal (2x)	PTFE
9.	Tensioning screw	V2A (AISI 304)
10.	Handle	V2A (AISI 304)
11.	Spring washer	V2A (AISI 304)
12.	Nut	V2A (AISI 304)
13.	Hand sleeve	PVC (blue)
14.	Locking device	V2A (AISI 304)

Water - Oil - Gas

Inner thread acc. to DIN ISO 228

Outer thread acc. to DIN 2999



als 3D-Modell verfügbar

