


reducer, eccentric  
length=3(D-d)

[short name: RE\\*](#)

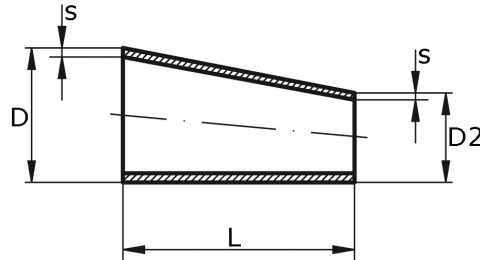

### technical product sheet

D	D2	s	L	kg	Art.-Nr.
28,0	18,0	1,5	30	0,000	RE-028-018
44,5	36,0	2,0	24	0,000	RE-044-036
54,0	36,0	2,0	54	0,122	RE-054-036
54,0	44,5	2,0	30	0,100	RE-054-044
69,0	54,0	2,0	45	0,134	RE-069-054
104,0	84,0	2,0	60	0,247	RE-104-084
129,0	84,0	2,0	135	0,821	RE-129-084
129,0	104,0	2,0	75	0,406	RE-129-104
154,0	69,0	2,0	255	0,000	RE-154-069
154,0	104,0	2,0	150	0,969	RE-154-104
204,0	104,0	2,0	300	2,273	RE-204-104
204,0	129,0	2,0	255	1,861	RE-204-129
204,0	154,0	2,0	150	1,250	RE-204-154
206,0	156,0	3,0	150	0,000	RE-206-156
254,0	154,0	2,0	300	3,200	RE-254-154
256,0	156,0	3,0	300	4,643	RE-256-156
256,0	206,0	3,0	150	2,411	RE-256-206
306,0	256,0	3,0	150	0,000	RE-306-256

available material: 316L

Butt welding fittings > reducers > welded, eccentric > L=3(D-d) > paper-range