



T-kus, 3000 liber kovaný

ASME B 16.11, ASTM-A 182

ASME B 16.11, ASTM-A 182

[zkratka označení: TS3000\\*](#)




### technický list výrobku

NPT	t	A	D	kg
1/4"	8,13	24,6	25,4	0,190
3/8"	9,14	28,6	33,3	0,390
1/2"	10,92	33,3	38,1	0,560
3/4"	12,27	38,1	46,0	0,830
1"	14,73	44,5	55,6	1,503
1 1/4"	17,02	50,8	61,9	1,660
1 1/2"	17,78	60,3	75,4	3,120
2"	19,05	63,5	84,1	4,000

dostupné jakosti: na poptávku

Fitinky závitové > fitinky > PN 10 (ECO-Line) > ... se závitem NPT > vysoký tlak > T-kusy

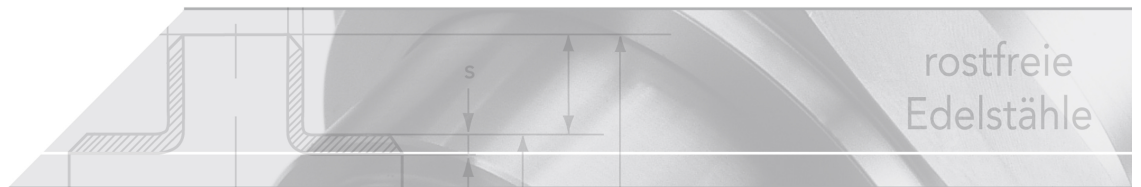

### Gewindelängen

Größe	B min.	L2 min.	A min.
1/8	6,4	6,7	10
1/4	8,1	10,2	11
3/8	9,1	10,4	13
1/2	10,9	13,6	14
3/4	12,7	13,9	16
1	14,7	17,3	19
1¼	17,0	18,0	21
1½	17,8	18,4	21
2	19,0	19,2	22
2½	23,6	28,9	27
3	25,9	30,5	28
4	27,7	33,0	32

### DRUCK-TEMPERATUR TABELLE

316L - Class 3000 - gemäß ANSI B 16.11 - 1966

Temperatur	Druck
0-100 °C	148 bar
150 °C	139 bar
200 °C	115 bar
250 °C	103 bar
300 °C	100 bar
350 °C	93 bar
400 °C	87 bar
450 °C	82 bar