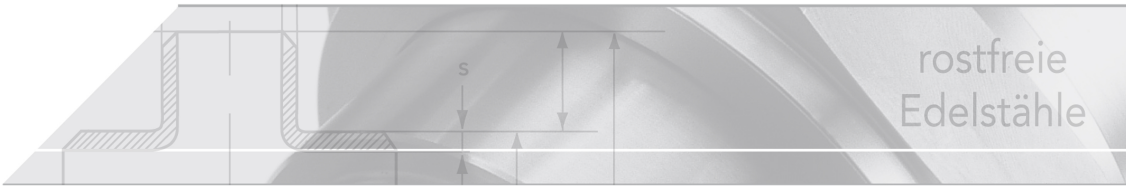

úhlové vnější šroubení

zkratka označení: 2353-WE M*

DIN 2353, EN ISO 8434-1

Těsnicí hrana tvar B





technický list výrobku

Reihe	FG	D	PN	L	L2	L3	L4	SW	SW2	kg	Art.-Nr.
leicht	M 26 x 1,5	22	160	44,0	27,5	16,0	26,0	27	36	0,000	2353-WE22LM26
leicht	M 33 x 2	28	160	47,0	30,5	18,0	30,0	36	41	0,000	2353-WE28LM33
leicht	M 42 x 2	35	160	56,0	34,5	20,0	34,0	41	50	0,000	2353-WE35LM42
leicht	M 48 x 2	42	160	63,0	40,0	22,0	39,0	50	60	0,000	2353-WE42LM48
schwer	M 27 x 2	20	400	48,0	26,5	16,0	26,0	27	36	0,000	2353-WE20SM27
schwer	M 33 x 2	25	400	54,0	30,0	18,0	30,0	36	46	0,000	2353-WE25SM33
schwer	M 42 x 2	30	400	62,0	35,5	20,0	34,0	41	50	0,000	2353-WE30SM42
schwer	M 48 x 2	38	250	72,0	41,0	22,0	39,0	50	60	0,000	2353-WE38SM48

dostupné jakosti: na poptávku

Systémy › zářezné kroužky › úhlová šroubení › vnější závit › metrický válcový závit

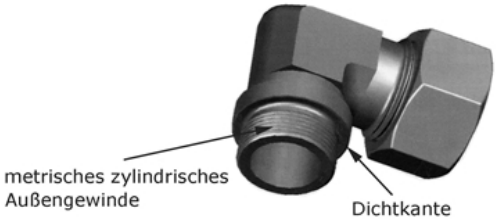

Banjo elbow coupling made of stainless steel
DIN 2353, EN ISO 8341-1

Threaded studs Form B

DIN 3852 T2, ISO 1179-4
metallic seal due to seal edge
metric DIN-ISO-thread (cylindrical)
DIN 13 - T5 - T7, ISO 261, ISO 724

Nominal pressures PN

Series	Pipe OØ	PN
L (light)	6 - 15	250
	18 - 22	160
	28 - 42	100
S (heavy)	6 - 14	630
	16 - 25	400
	30 - 38	250

The nominal pressure is a commonly used rounded-off number referring to the pressure that is listed for static loads with a 3- or 4-fold safety margin.

Pressure deductions

Temperature	Pressure deduction
+50°C	4,5%
+100°C	11%
+200°C	20%
+300°C	29%
+400°C	33%

For seal materials such as FPM and Viton, the temperature limits of -25 to +200°C must be noted.

All values specified are guidelines that can also be influenced to a greater or lesser extent by the medium.