


N-piece

[short name: FFNS*](#)

bend 90°

double flange connection

base plate

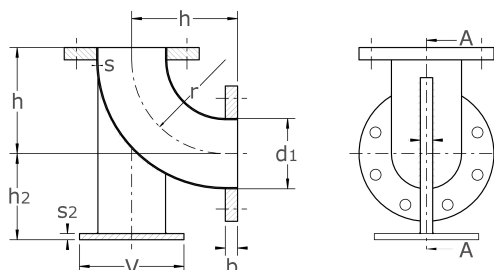

technical product sheet

DN	d1	s	r	DIN	b	h	h2	s2	V	kg	Art.-Nr.
50	60,3	2,0	135,0	red. Blatt	10	135,0	145,0	5,0	120	5,340	FFNS-050X20-1
80	88,9	2,0	114,5	2576	20	114,5	119,5	5,0	160	0,000	FFNS-080X20-4
100	114,3	2,0	152,0	2576	20	152,0	157,0	5,0	180	11,560	FFNS-100X20-1
125	139,7	2,0	190,5	2576	22	190,5	195,5	5,0	210	0,000	FFNS-125X20-4
125	139,7	2,0	190,5	red. Blatt	12	190,5	195,5	5,0	210	0,000	FFNS-125X20-4
150	168,3	2,0	229,0	2576	22	229,0	234,0	5,0	240	0,000	FFNS-150X20-2
200	219,1	2,0	305,0	2576	22	305,0	310,0	5,0	295	0,000	FFNS-200X20-2

available material: ask

Flanges > flange-fittings > N-pieces

N-piece

Stainless steel construction welded using protective gas, welded, pickled in the dipping bath and passivated. Consisting of a 90° elbow with floor supports and two flat flanges.

Standard part for pipes

for the connection of two flanged pipes at a right angle.

Design for nominal pressure PN 10.

Flanges drilled as flat flanges according to DIN 2576.

Dimension range

DN 15 to DN 1000

Floor supports

Welded as a flat iron on the arc with a square base plate

Please specify the "h2" dimension (height above the floor) when ordering.

Special equipment on request

- Flange changes corresponding to the mounting conditions are possible
- nominal pressure PN 16/ PN 25

