


socket, thick-walled

short name: MUDI*

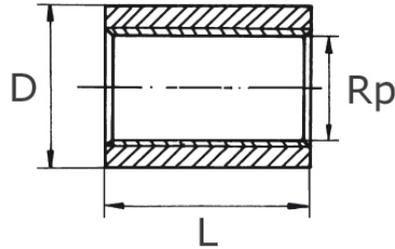


technical product sheet

Ausf	Rp	L	D
Standard	1/8"	17,0	18,0
Standard	1/4"	25,0	22,0
Standard	3/8"	26,0	26,0
Standard	1/2"	34,0	30,0
Standard	3/4"	36,0	36,0
Standard	1"	43,0	45,0
Standard	1 1/4"	48,0	55,0
Standard	1 1/2"	48,0	60,0
Standard	2"	56,0	70,0
Standard	2 1/2"	65,0	90,0
Standard	3"	71,0	106,0
Standard	4"	83,0	130,0
Sonderlänge	1/4"	30,0	22,0
Sonderlänge	3/8"	20,0	25,0
Sonderlänge	3/8"	20,0	26,0
Sonderlänge	3/8"	60,0	26,0
Sonderlänge	1/2"	15,0	30,0
Sonderlänge	1/2"	27,0	32,0
Sonderlänge	1/2"	30,0	30,0
Sonderlänge	1/2"	35,0	32,0
Sonderlänge	1/2"	40,0	30,0
Sonderlänge	1/2"	60,0	32,0
Sonderlänge	1/2"	80,0	32,0
Sonderlänge	1/2"	110,0	30,0
Sonderlänge	3/4"	16,0	36,0
Sonderlänge	3/4"	17,0	36,0
Sonderlänge	3/4"	60,0	36,0
Sonderlänge	1"	20,0	45,0
Sonderlänge	1"	25,0	45,0
Sonderlänge	1"	45,0	20,0
Sonderlänge	1"	60,0	45,0
Sonderlänge	1 1/4"	130,0	55,0
Sonderlänge	1 1/2"	15,0	65,0
Sonderlänge	1 1/2"	21,5	63,0
Sonderlänge	1 1/2"	30,0	60,0
Sonderlänge	1 1/2"	40,0	60,0
Sonderlänge	1 1/2"	40,0	65,0

Ausf	Rp	L	D
Sonderlänge	1 1/2"	43,0	60,0
Sonderlänge	1 1/2"	50,0	65,0
Sonderlänge	1 1/2"	80,0	65,0
Sonderlänge	1 1/2"	120,0	65,0
Sonderlänge	2"	15,0	70,0
Sonderlänge	2"	25,0	70,0
Sonderlänge	2"	30,0	70,0

available material: 1.4301, 1.4571

Threaded fittings > fittings > PN 10 (ECO-Line) > sockets > special versions > thick-walled

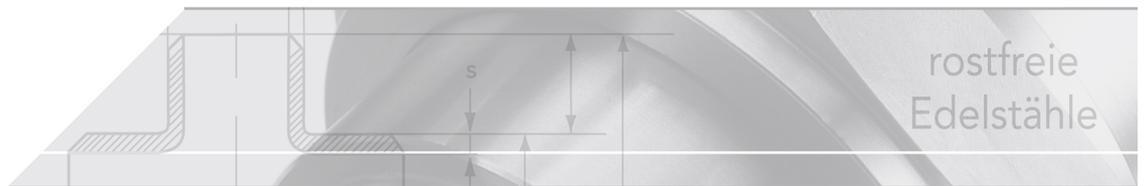

Socket, thick-walled made of stainless steel

with continuous inner thread

Version

made of seamless pipe, hollow bars or full material

stainless steel material-no. 1.4307/ 1.4571/ 1.4404; optional 1.4541 / 1.4539 / 1.4828 / ...

with certificate acc. to DIN EN 10204-3.1

Length acc. to. EN 10241:2000; optional in special lengths

cylindrical inner thread, code Rp

Thread DIN EN 10226-1:2004 (old DIN 2999) or ISO 7-1; optional acc. to ISO 228-1 "G"