


solenoid valve

[short name: MV*](#)

with spring return

> aluminum (anodized)

> NAMUR interface

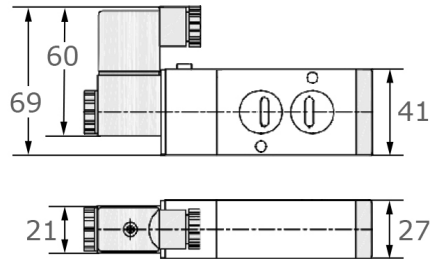

technical product sheet


Typ	Volt	IP	kg	Art.-Nr.
5/2 Wege	24V AC	IP65	0,320	MV52-AC24V
5/2 Wege	24V DC	IP65	0,320	MV52-DC24V
5/2 Wege	230V AC	IP65	0,302	MV52-AC230V
3/2 Wege (mit Adapterplatte	24V AC	IP65	0,300	MV32-AC24V
3/2 Wege (mit Adapterplatte	24V DC	IP65	0,380	MV32-DC24V
3/2 Wege (mit Adapterplatte	230V AC	IP65	0,300	MV32-AC230V

available material: ask

Industrial valves > ball valves > with actuator > pneumatic > accessories > solenoid valves > standard

full description:

solenoid valve
 with spring return
 > aluminum (anodized)
 > NAMUR interface
 > temperature range: 5°C to 60°C
 (Please notice the operating manual!)

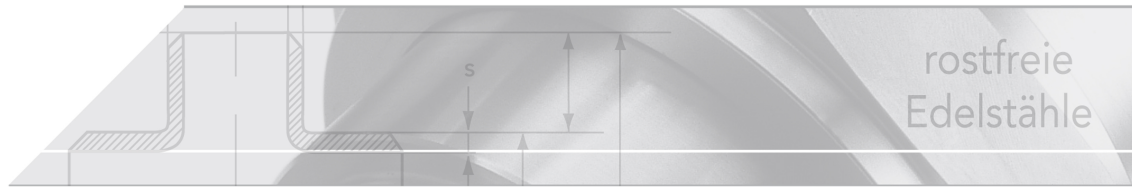

Technical data

With an adapter plate, this 5/2-way valve can be converted to 3/2-way operation.

Designation	Properties
Housing	Aluminium (anodized)
Seal	NBR
max. permissible pressure	10 Bar
Temperature range	5°C to 60°C
Type of protection	IP65
available voltages	DC: 24V / AC: 24V, 230V
Interface	NAMUR
electr. connection	10mm Plug acc. to DIN 40050
Supply	Oiled, filtered compressed air
Air connections	T 1/4

