

těsnící kroužek, černý  
Homologace pro pitnou vodu

[zkratka označení: DR.E\\*](#)




### technický list výrobku

Rohr-AD	S	c	Art.-Nr.
15,0	2,6	schwarz	PRFI-DR-015-EPDM
18,0	2,6	schwarz	PRFI-DR-018-EPDM
22,0	3,2	schwarz	PRFI-DR-022-EPDM
28,0	3,1	schwarz	PRFI-DR-028-EPDM
35,0	3,1	schwarz	PRFI-DR-035-EPDM
42,0	4,1	schwarz	PRFI-DR-042-EPDM
54,0	4,1	schwarz	PRFI-DR-054-EPDM
76,1	8,0	schwarz	PRFI-DR-076-EPDM
88,9	8,2	schwarz	PRFI-DR-088-EPDM
108,0	11,0	schwarz	PRFI-DR-108-EPDM

dostupné jakosti: EPDM

Systémy > lisovací fitinky > těsnící kroužky > O-kroužek

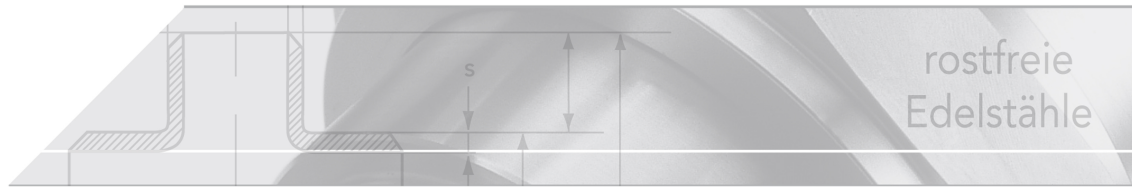

## NUMEPRESS

Stainless steel-press-system

### O-Rings

Property	Description
EPDM	ethylene-caoutchouc
Colour	black
Resistance/ deployment	aging and warm water
Applications	sanitary-water, heating, fire protection, compressed
Temperature	-20°C bis +110°C

\*Compressed air

The NUMEPRESS - System can be used up to 16 bar.

For compressed air installations FKM gaskets (green) are recommended due to the usual oil residues.

If the residues of the oil quantity are below 1 mg/m<sup>3</sup> the EPDM standard gasket can be used.

