


2-dílný kulový kohout  
s křídlovou rukojetí  
plný průtok  
se závitovými konci

[zkratka označení: K2FG\\*](#)


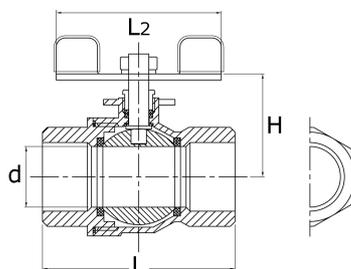


### technický list výrobku

Typ	DN	G	L	d	H	L2	PN	kg	Art.-Nr.
K2	8	1/4"	60	11,6	31	60	130	0,211	K2FG-014-000-4
K2	10	3/8"	60	12,5	32	60	130	0,200	K2FG-038-000-4
K2	15	1/2"	75	15,0	34	60	130	0,280	K2FG-012-000-4
K2-ECO	8	1/4"	48	11,6	29	60	63	0,144	K2FG-014-ECO-4
K2-ECO	10	3/8"	48	12,5	29	60	63	0,160	K2FG-038-ECO-4
K2-ECO	15	1/2"	57	15,0	32	60	63	0,220	K2FG-012-ECO-4
K2-ECO	20	3/4"	65	20,0	40	80	63	0,340	K2FG-034-ECO-4
K2-ECO	25	1"	77	25,0	45	80	63	0,571	K2FG-100-ECO-4

dostupné jakosti: V4A

Armatury > kulové kohouty > závitové konce > dvoudílné, plný průtok > s křídlovou rukojetí

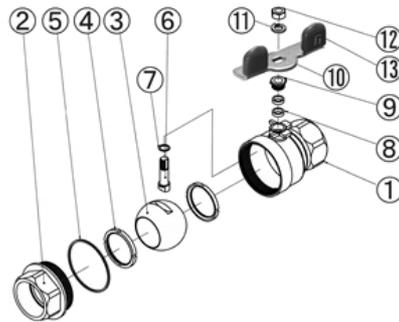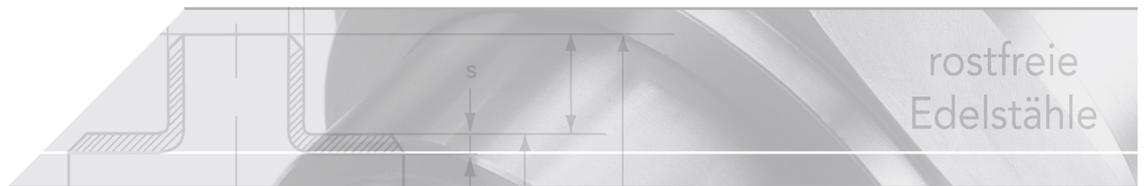

### Parts list

No.	Designation	Material
1.	Housing	V4A (CF8M/ 1.4408)
2.	Threaded flange	V4A (CF8M/ 1.4408)
3.	Ball	V4A (CF8M/ 1.4408)
4.	Ball seal (2x)	PTFE
5.	Housing seal	PTFE
6.	Control shaft	V4A (CF8M/ 1.4408)
7.	Shaft seal	PTFE
8.	Stem packing seal (2x)	PTFE
9.	Tensioning screw	V2A (AISI 304)
10.	Butterfly handle*	V2A (AISI 304)
11.	Spring washer	V2A (AISI 304)
12.	Nut	V2A (AISI 304)
13.	Coating	PVC (blue)

\*length tolerance possible for +/- 5mm

### Water - Oil - Gas

mit Inner thread DIN ISO 228

