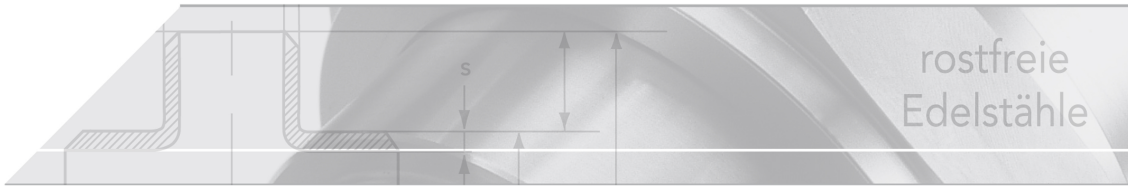

welding nipple

short name: ORAN*

one-sided bored
to 2,0 mm thickness of walls
without bevel, 5,0 mm deep



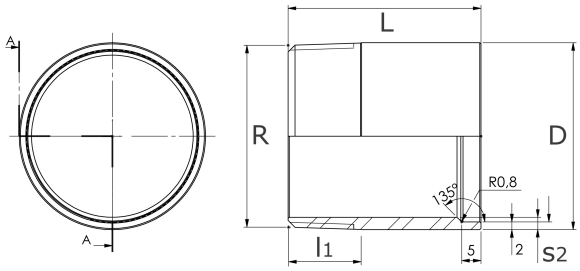

technical product sheet

R	D	L	l1	d	s	s2	kg
1/4"	13,5	30	11	8,8	2,0	2,3	0,015
3/8"	17,2	30	12	12,5	2,0	2,3	0,021
1/2"	21,3	40	15	16,0	2,0	2,6	0,040
3/4"	26,9	40	17	21,6	2,0	2,6	0,040
1"	33,7	45	20	27,2	2,0	3,2	0,080
1 1/4"	42,4	50	22	35,9	2,0	3,2	0,124
1 1/2"	48,3	50	22	41,8	2,0	3,2	0,140
2"	60,3	55	26	53,0	2,0	3,6	0,221
2 1/2"	76,1	60	32	68,8	2,0	3,6	0,280
3"	88,9	70	35	80,8	2,0	4,0	0,440

available material: 1.4571, 316L

Threaded fittings › fittings › PN 10 (ECO-Line) › nipples › welding nipples › with orbital weld-on end

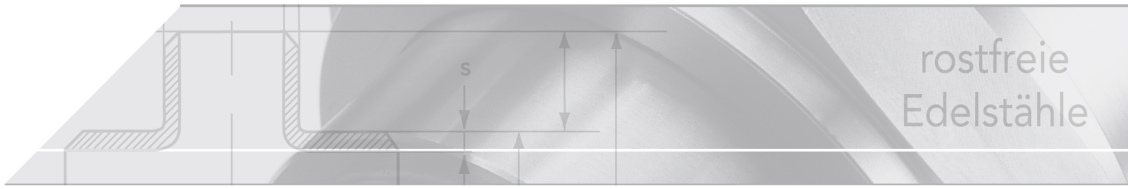

Welding nipple with Inner orbital welding phase made of stainless steel

Threads:

Whitworth-Pipe threads according to DIN 2999

Type of thread	Version	Code
Inner thread	cylindrical	Rp
Outer thread	tapered	R

Application:

For threaded pipes and fittings, sealed using sealing material in the threads.
Connections sealed in the threads are specified in various national and international standards (ISO 7/1, BS 21, DIN 2999).