


dvoudílný kulový kohout Ig/Ig

[zkratka označení: DVGW.W.K2.M*](#)

DVGW-W

UNIWATER, plný průtok




technický list výrobku

DN	G	t	L	H	L2	PN	Griff	kg
10	3/8"	12	60	36	84	50	grün	0,160
15	1/2"	15	75	46	84	50	grün	0,235
20	3/4"	16	80	50	84	40	grün	0,350
25	1"	20	90	55	100	40	grün	0,560
32	1 1/4"	21	110	72	117	40	grün	1,000
40	1 1/2"	24	120	75	136	40	grün	1,590
50	2"	27	140	85	136	40	grün	2,700
65	2 1/2"	33	185	100	163	20	grün	4,460
80	3"	38	210	114	225	20	grün	7,390
100	4"	40	250	120	225	20	grün	13,200

dostupné jakosti: na poptávku

Armatury > kulové kohouty > závitové konce > dvoudílné, plný průtok > DVGW > mosaz > homologace pro vodu

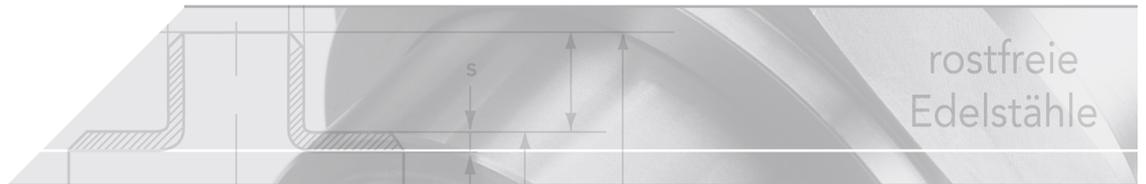

DIN EN ball valve UNIWATER

acc. to DIN EN 13828

Housing:

- > Brass CW 617 N with full passage
- > Ball: Brass CW 614 N, Chrome-plated - with full cylindrical passage
- > Seals: PTFE (on ball and stem)
- > Stem: Brass CW 614 N rough - with adjustable stem packing
- > Handle: Steel level / ISO-T-Handle / Wing handle green, also available in red and blue

- > Temperature: up to 150°C (see Diagram)
- > Pressure: up to 50 bar (see Diagram)

