


union flat, F/F

[short name: VF.II*](#)

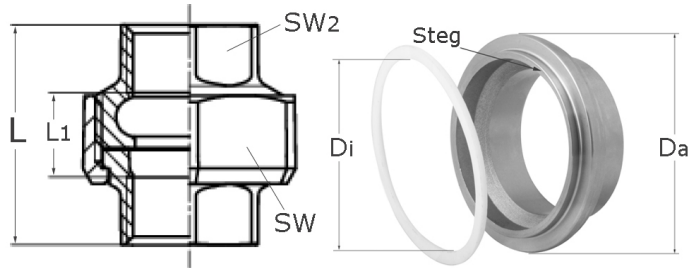

technical product sheet

Rp	L	L1	SW	SW2	Da	Di	Z-Steg	Fabrikat	kg	Art.-Nr.
1/8"	26	11	25	14	19,0	10,0	Nein	BMP	0,083	VF-018-0II
1/8"	27	11	21	13	16,0	10,0	Nein	Haoxing	0,083	VF-018-0II
1/8"	27	13	25	13	19,0	14,0	Ja	Valve-tek	0,083	VF-018-0II
1/4"	28	11	28	17	22,0	15,0	Nein	TGGL	0,150	VF-014-0II
1/4"	31	12	24	16	19,0	15,0	Nein	Haoxing	0,150	VF-014-0II
3/8"	26	12	32	20	26,0	17,0	Nein	BMP	0,111	VF-038-0II
3/8"	34	13	30	21	23,5	17,0	Nein	Haoxing	0,111	VF-038-0II
1/2"	30	12	36	24	30,0	22,0	Nein	TGGL	0,148	VF-012-0II
1/2"	37	14	35	25	28,0	21,0	Nein	Haoxing	0,148	VF-012-0II
3/4"	34	13	40	30	34,0	26,5	Nein	TGGL	0,230	VF-034-0II
1"	38	14	49	37	41,0	36,0	Nein	TGGL	0,300	VF-100-0II
1 1/4"	45	16	60	46	52,5	41,5	Nein	TGGL	0,295	VF-114-0II
1 1/4"	45	16	60	46	52,5	44,0	Ja	TGGL	0,295	VF-114-0II
1 1/4"	51	20	59	46	52,0	43,0	Nein	Haoxing	0,295	VF-114-0II
1 1/2"	50	18	65	52	57,5	49,5	Nein	TGGL	0,492	VF-112-0II
1 1/2"	50	20	67	53	59,0	50,0	Nein	Haoxing	0,492	VF-112-0II
2"	54	20	79	64	72,0	61,0	Nein	TGGL	0,955	VF-200-0II
2"	56	21	82	66	73,0	61,0	Nein	Haoxing	0,955	VF-200-0II
2 1/2"	59	22	95	80	86,0	76,0	Nein	TGGL	1,725	VF-212-0II
3"	72	25	115	95	105,0	89,0	Nein	Haoxing	1,788	VF-300-0II
4"	95	32	153	125	137,6	119,9	Nein		3,116	VF-400-0II

available material: V4A

Threaded fittings > unions > flat seat > PN 10 (ECO-Line) > female thread



Union, flat sealed made of stainless steel

with inner- and inner thread
incl. flat seal made of PTFE

Threads:

Whitworth-Pipe threads according to DIN 2999

Type of thread	Version	Code
Inner thread	cylindrical	Rp
Outer thread	tapered	R

Application:

For threaded pipes and fittings, sealed using sealing material in the threads.
Connections sealed in the threads are specified in various national and international standards (ISO 7/1, BS 21, DIN 2999).