


F elbow with wallnut  
pressfitting, M profile  
DVGW-approval for water

[short name: N.09\\*](#)

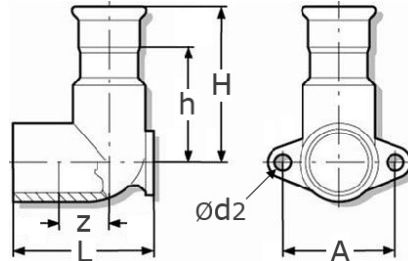


#### technical product sheet

Rohr-AD	Rp	A	h	z	L	d2	H	DW	Abnahme
15,0	1/2"	34	28,0	17,0	44,0	5,0	50,0	EPDM	DVGW
15,0	1/2"	34	28,0	17,0	44,0	5,0	50,0	FKM	-
18,0	1/2"	34	30,0	17,0	44,0	5,0	50,0	EPDM	DVGW
18,0	1/2"	34	30,0	17,0	44,0	5,0	50,0	FKM	-
22,0	3/4"	40	33,0	20,0	51,0	6,0	54,0	EPDM	DVGW
22,0	3/4"	40	33,0	20,0	51,0	6,0	54,0	FKM	-

available material: 316L

Systems > press fittings > elbows > wall plate elbows > Backplate Elbow 90° with female thread

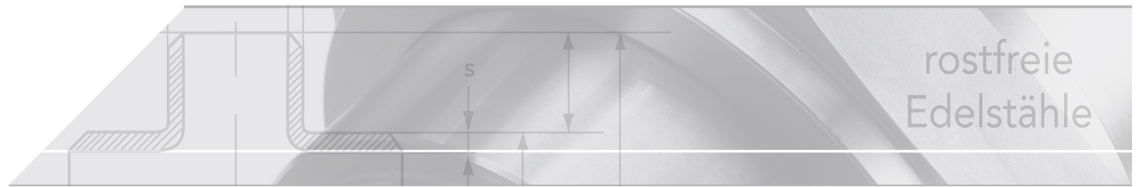

## NUMEPRESS

Stainless steel press-system

### Properties

Unsolvable press connection acc. to EN 10088

M profile, system independent

Nominal pressure for water applications max. 16 bar

Stainless steel 1.4404 (AISI 316L)

Female thread acc. to EN 10226

DVGW-approval for water

ÖVGW-certificate for water installations

SVGW SSIGE - certificate for water distribution systems

FM APPROVED

### Gaskets

Material	Colour	Application	Temperature
EPDM	black	water	-20° - +110° C
FKM	green	solar, oil, compressed ai	-30° - +180° C
FPM	red	steam	-20° - +200° C

