
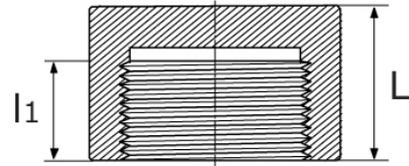


hexagon cap, 3000 lbs

[short name: KA6.3000*](#)

ASME B 16.11, ASTM-A 182




technical product sheet

NPT	L	SW	l1	kg	Art.-Nr.
1/4"	25	17	10,2	0,085	NPT3-KA-014-6KT-N
3/8"	25	21	10,4	0,093	NPT3-KA-038-6KT-N
1/2"	32	27	13,6	0,109	NPT3-KA-012-6KT-N
3/4"	37	30	13,9	0,213	NPT3-KA-034-6KT-N
1"	41	38	17,3	0,366	NPT3-KA-100-6KT-N
1 1/4"	44	50	8,0	0,000	NPT3-KA-114-6KT-N
1 1/2"	44	55	18,4	0,890	NPT3-KA-112-6KT-N
2"	48	68	19,2	1,175	NPT3-KA-200-6KT-N

available material: ask

Threaded fittings > fittings > PN 10 (ECO-Line) > ...with NPT-thread > high pressure > caps/plugs > hexagon

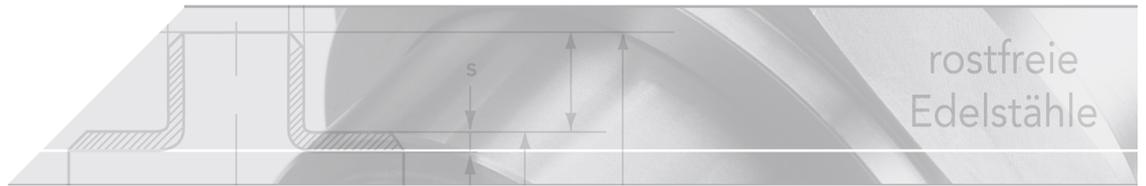

DRUCK-TEMPERATUR TABELLE

316L - Class 3000 - gemäß ANSI B 16.11 - 1966

Temperatur	Druck
0-100 °C	148 bar
150 °C	139 bar
200 °C	115 bar
250 °C	103 bar
300 °C	100 bar
350 °C	93 bar
400 °C	87 bar
450 °C	82 bar

Gewindelängen

Größe	B min.	L2 min.	A min.
1/8	6,4	6,7	10
1/4	8,1	10,2	11
3/8	9,1	10,4	13
1/2	10,9	13,6	14
3/4	12,7	13,9	16
1	14,7	17,3	19
1¼	17,0	18,0	21
1½	17,8	18,4	21
2	19,0	19,2	22
2½	23,6	28,9	27
3	25,9	30,5	28
4	27,7	33,0	32

