


welding socket

[short name: ORMU\\*](#)

one-sided bored

to 2,0 mm thickness of walls

without bevel, 5,0 mm deep

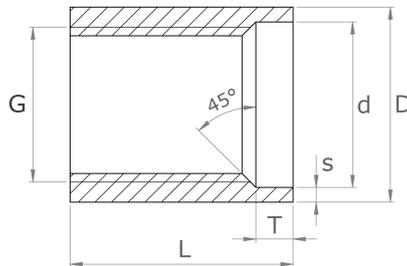

### technical product sheet

G	L	D	d	s	T	kg	Art.-Nr.
1/4"	25	18,5	14,5	2,0	5	0,026	ORMU-014-000-N
3/8"	26	21,5	17,5	2,0	5	0,030	ORMU-038-000-N
1/2"	34	26,5	22,5	2,0	5	0,060	ORMU-012-000-N
3/4"	36	32,0	28,0	2,0	5	0,089	ORMU-034-000-N
1"	43	39,5	35,5	2,0	5	0,139	ORMU-100-000-N
1 1/4"	48	48,3	44,3	2,0	5	0,183	ORMU-114-000-N
1 1/2"	48	54,5	50,5	2,0	5	0,225	ORMU-112-000-N
2"	56	66,3	62,3	2,0	5	0,341	ORMU-200-000-N
2 1/2"	65	82,0	78,0	2,0	5	0,000	ORMU-212-000-N
3"	71	95,0	91,0	2,0	5	0,675	ORMU-300-000-N

available material: 1.4404, 1.4571

Threaded fittings > fittings > PN 10 (ECO-Line) > sockets > special versions > orbital fittings > for welding