


ploché šroubení, vni/vně závit
s těsněním PTFE

[zkratka označení: LR131U*](#)

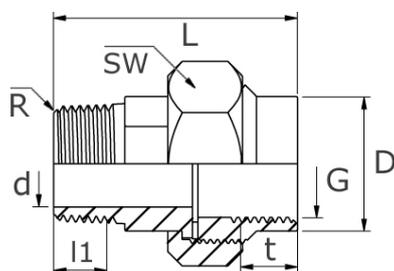


technický list výrobku

R	L	l1	t	D	d	SW	Mutter	PN	kg	Art.-Nr.
1/8"	42	9	10	17,0	5,0	27	M22x1,5	100	0,090	VFIA-018LR131U
1/4"	42	12	13	17,0	7,5	27	M22x1,5	100	0,080	VFIA-014LR131U
3/8"	49	14	14	24,5	11,0	30	M26x1,5	100	0,110	VFIA-038LR131U
1/2"	56	17	16	24,5	14,0	36	M30x1,5	100	0,170	VFIA-012LR131U
3/4"	63	18	28	31,0	19,0	42	M38x1,5	100	0,260	VFIA-034LR131U
1"	69	20	22	38,0	24,0	50	M45x2	100	0,390	VFIA-100LR131U
1 1/4"	74	21	24	47,0	30,0	60	M54x2	64	0,590	VFIA-114LR131U
1 1/2"	80	22	25	54,0	38,0	67	M62x2	64	0,730	VFIA-112LR131U
2"	88	23	26	66,5	49,0	86	M75x2	64	1,300	VFIA-200LR131U
2 1/2"	101	25	28	98,0	65,0	110	3 1/2"	40	3,570	VFIA-212LR131U
3"	101	33	30	98,0	76,0	128	4"	40	2,910	VFIA-300LR131U

dostupné jakosti: 1.4404

Fitinky závitové > šroubení > ploché těsnění > PN 50/ 100 > LR-131 U

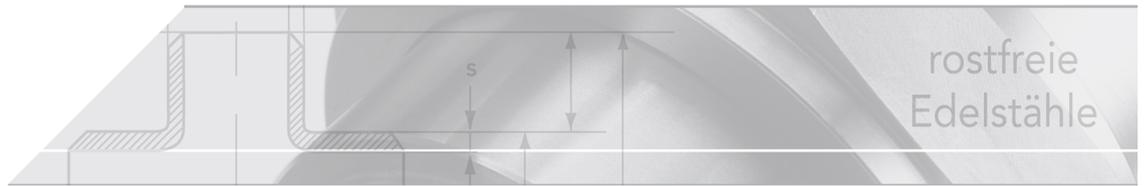

Coupling

LR-131 U

- > manufactured from solid material – „threaded version“
- > material 1.4404/ AISI 316L
- > flat sealing, incl. O-ring made of PTFE
- > outer thread acc. to ISO 7/1 (BSP-R), optional with NPR-thread
- > outer thread at the insert component
- > BSP thread according to ISO 228/1; optional with NPT thread
- > wrench surface of the nut: to DN 1"6-sided; DN 1 1/4" and higher 8-sided

type selection

Property	LR-131	R-134*
Series	heavy	light
Pressure level	PN 100	PN 40
kit system	No	Yes

* = If you use a seal, the conic coupling becomes a flat sealing coupling

