


šroubení s navařovacími konci
ploché těsnění
s těsněním PTFE

[zkratka označení: LR131S*](#)




technický list výrobku

Zoll	D	s	L	SW	Mutter	PN	kg	Art.-Nr.
1/4"	14,0	2,0	32	27	M22x1,5	100	0,070	VFSS-014LR131S
3/8"	18,0	2,0	37	30	M26x1,5	100	0,090	VFSS-038LR131S
1/2"	21,3	2,7	41	36	M30x1,5	100	0,150	VFSS-012LR131S
3/4"	26,9	2,0	48	42	M38x1,5	100	0,220	VFSS-034LR131S
1"	33,7	3,3	52	50	M45x2	100	0,350	VFSS-100LR131S
1 1/4"	42,4	3,2	58	60	M54x2	64	0,500	VFSS-114LR131S
1 1/2"	48,3	2,7	63	67	M62x2	64	0,620	VFSS-112LR131S
2"	60,3	2,7	69	86	M75x2	64	1,080	VFSS-200LR131S

dostupné jakosti: 1.4404

Fitinky závitové > šroubení > ploché těsnění > PN 50/ 100 > LR-131 S

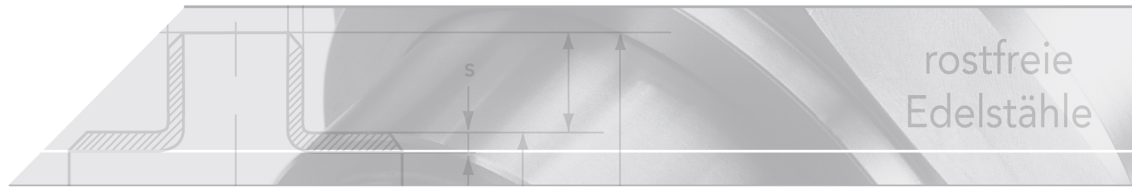

Coupling

LR-131 S

- > manufactured from solid material – „threaded version“
- > material 1.4404/ AISI 316L
- > flat sealing, incl. O-ring made of PTFE
- > BSP thread according to ISO 228/1; optional with NPT thread
- > wrench surface of the nut: to DN 1"6-sided; DN 1 1/4" and higher 8-sided

type selection

Property	LR-131	R-134*
Series	heavy	light
Pressure level	PN 100	PN 40
kit system	No	Yes
Union nut thread	inches	metric

* = If you use a seal , the conic coupling becomes a flat sealing coupling

