


úhlové šroubení - ISO 4144

[zkratka označení: WF.IA*](#)

vnitřní/vnější závit

ploché těsnění

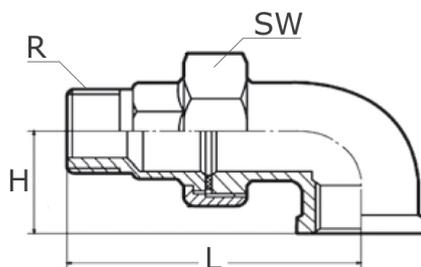


technický list výrobku

G	L	H	SW	Art.-Nr.
1/4"	59	21	30	WF-014-0IA
3/8"	61	25	35	WF-038-0IA
1/2"	71	28	41	WF-012-0IA
3/4"	79	33	50	WF-034-0IA
1"	88	38	55	WF-100-0IA
1 1/4"	103	45	65	WF-114-0IA
1 1/2"	110	50	72	WF-112-0IA
2"	119	58	88	WF-200-0IA

dostupné jakosti: 1.4408

Fitinky závitové > šroubení > ploché těsnění > PN 20 (ISO 4144) > úhlové šroubení, vni/vně

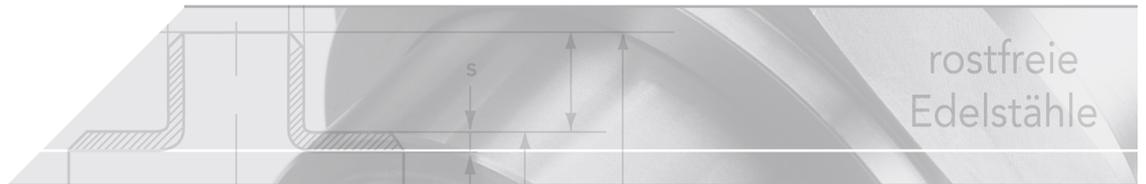

Elbow union

flat sealing

Version

standard according to ISO 4144

material AISI 316/ 1.4408 (V4A)

inspection certificate (APZ) according to DIN EN 10204-3.1

PTFE seal (please ask about sealing materials for temperatures above 100 °C!)

female thread cylindrical according to ISO 228-1 (Code G)

male thread tapered according to EN 10226 - ISO 7-1 (Code R)

Design

Temperature*

-20 to 40 °C

100 °C

150 °C

200 °C

220 °C

Pressure**

20 bar

16 bar

15 bar

14 bar

13 bar

* of the medium

** max. vibration-free operating pressure

Use only as a complete unit. Interchangeability is limited due to the inevitable tolerances in the thread production.

