


úhlové šroubení - ISO 4144

[zkratka označení: WK.II\\*](#)

vnitřní závit

kuželové těsnění

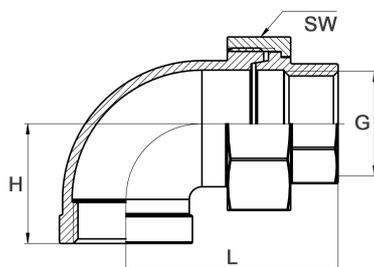


## technický list výrobku

G	L	H	SW	Art.-Nr.
1/4"	46	21	30	WK-014-0II
3/8"	49	25	35	WK-038-0II
1/2"	55	28	41	WK-012-0II
3/4"	63	33	50	WK-034-0II
1"	68	38	55	WK-100-0II
1 1/4"	80	45	65	WK-114-0II
1 1/2"	88	50	72	WK-112-0II
2"	94	58	88	WK-200-0II

dostupné jakosti: 1.4408

Fitinky závitové &gt; šroubení &gt; kuželové sedlo &gt; PN 20 (ISO 4144) &gt; 90° šroubení, vni/vni

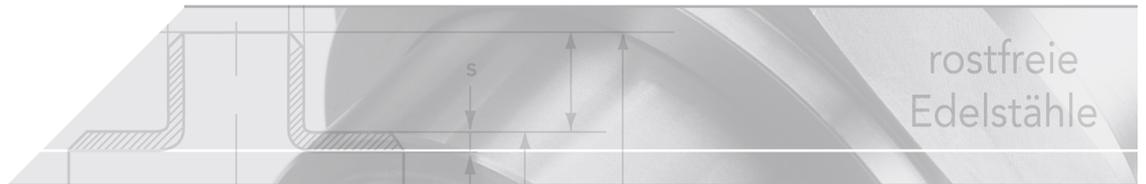

## Union

conical seat

### Version

standard according to ISO 4144

material AISI 316/ 1.4408 (V4A)

inspection certificate (APZ) according to DIN EN 10204-3.1

female thread cylindrical according to ISO 228-1 (Code G)

### Design

Temperature*	Pressure**
-20 to 40 °C	20 bar
100 °C	16 bar
150 °C	15 bar
200 °C	14 bar
220 °C	13 bar

\* of the medium

\*\* max. vibration-free operating pressure

*Use only as a complete unit. Interchangeability is limited due to the inevitable tolerances in the thread production.*

