


šestihránná vsuvka  
ISO 4144

[zkratka označení: DN6.I\\*](#)




### technický list výrobku

R	L	SW	Art.-Nr.
1/8"	24	12	DN-018-6KT
1/4"	28	16	DN-014-6KT
3/8"	28	19	DN-038-6KT
1/2"	34	22	DN-012-6KT
3/4"	40	30	DN-034-6KT
1"	46	36	DN-100-6KT
1 1/4"	53	46	DN-114-6KT
1 1/2"	54	50	DN-112-6KT
2"	62	64	DN-200-6KT
2 1/2"	70	80	DN-212-6KT
3"	78	90	DN-300-6KT
4"	94	120	DN-400-6KT

dostupné jakosti: 1.4408

Fitinky závitové > fitinky > PN 16/ 20 (ISO 4144) > vsuvky > šestihran vsuvky

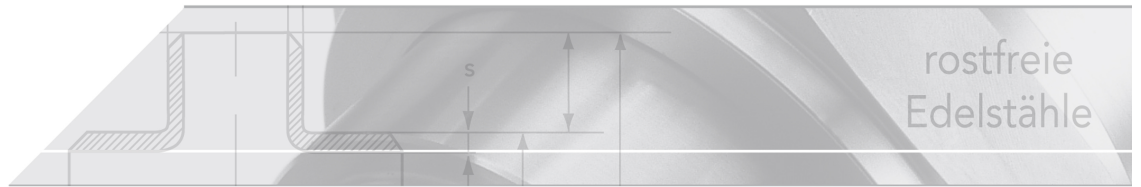

## Hexagon nipple

made of stainless steel

### version

standard according to ISO 4144

material AISI 316/ 1.4408 (V4A)

inspection certificate according to DIN EN 10204-3.1

male thread tapered according to EN 10226 - ISO 7-1 (code: R)

### design

temperature *	pressure **
-20 to 40 °C	20 bar
100 °C	16 bar
150 °C	15 bar
200 °C	14 bar
220 °C	13 bar

\* oft he medium

\*\* vibration-free max. operating pressure

