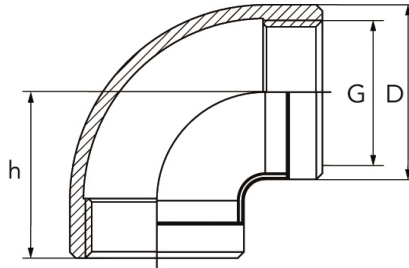


elbow 90° F/F - ISO 4144


 short name: [WI.II\\*](#)


## technical product sheet

G	h	D	Art.-Nr.
1/8"	17,0	17,0	WI-018-000
1/4"	21,0	19,0	WI-014-000
3/8"	24,0	22,5	WI-038-000
1/2"	27,0	27,5	WI-012-000
3/4"	31,0	33,0	WI-034-000
1"	38,0	41,0	WI-100-000
1 1/4"	45,0	50,0	WI-114-000
1 1/2"	50,0	56,5	WI-112-000
2"	57,0	70,0	WI-200-000
2 1/2"	69,7	87,0	WI-212-000
3"	77,0	99,5	WI-300-000
4"	98,2	126,0	WI-400-000

available material: 1.4408

Threaded fittings &gt; fittings &gt; PN 16/ 20 (ISO 4144) &gt; elbows / bends &gt; elbows 90°

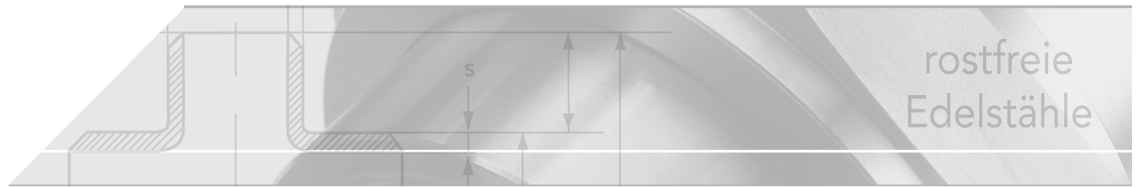

## Elbow

90° - socket connection

### Version

standard according to ISO 4144

material AISI 316 / 1.4407 (V4A)

inspection certificate (APZ) according to DIN EN 10204-3.1

female thread cylindrical according to ISO 228-1 (Code G)

### Design

#### Temperature\*

-20 to 40 °C

100 °C

150 °C

200 °C

220 °C

#### Pressure\*\*

20 bar

16 bar

15 bar

14 bar

13 bar

\* of the medium

\*\* max. vibration-free operating pressure

