


tee - ISO 4144


[short name: TS.I\\*](#)


## technical product sheet

G	D	l	L	Art.-Nr.
1/8"	17	17,5	35,0	TS-018-000
1/4"	19	19,5	39,0	TS-014-000
3/8"	23	23,6	47,2	TS-038-000
1/2"	28	28,0	56,0	TS-012-000
3/4"	33	32,5	65,0	TS-034-000
1"	41	38,5	77,0	TS-100-000
1 1/4"	50	45,0	90,0	TS-114-000
1 1/2"	56	48,5	97,0	TS-112-000
2"	70	58,0	116,0	TS-200-000
2 1/2"	87	70,0	140,0	TS-212-000
3"	100	78,5	157,0	TS-300-000
4"	125	97,0	194,0	TS-400-000

available material: 1.4408

Threaded fittings &gt; fittings &gt; PN 16/ 20 (ISO 4144) &gt; branches &gt; tees

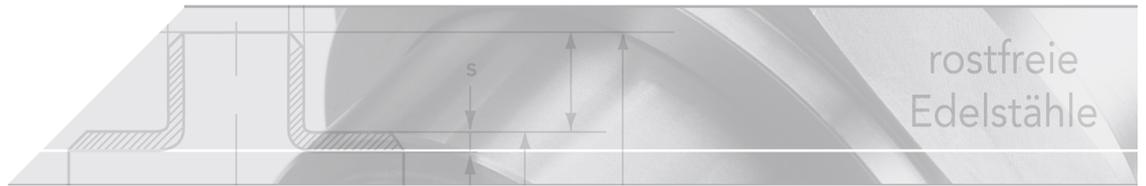

## Tees

all sides socket connection

### version

standard according to ISO 4144

material AISI 316/ 1.4408 (V4A)

inspection certificate according to DIN EN 10204-3.1

cylindrical female thread according to DIN ISO 228-1 (code: G)

### Auslegung

#### temperature\*

-20 to 40 °C

100 °C

150 °C

200 °C

220 °C

#### pressure\*\*

20 bar

16 bar

15 bar

14 bar

13 bar

\* of the medium

\*\* vibration-free max. operating pressure

