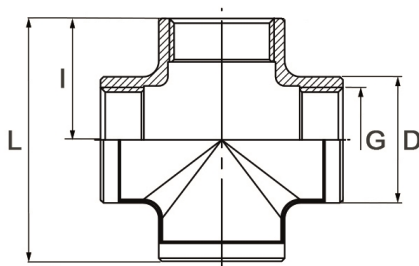


kříž - ISO 4144


[zkratka označení: KS.I*](#)


technický list výrobku

| G | D | I | L | Art.-Nr. |
|--------|----|------|-------|------------|
| 1/8" | 15 | 17,0 | 34,0 | KS-018-000 |
| 1/4" | 20 | 18,5 | 39,0 | KS-014-000 |
| 3/8" | 23 | 22,9 | 46,0 | KS-038-000 |
| 1/2" | 28 | 26,8 | 54,0 | KS-012-000 |
| 3/4" | 33 | 32,0 | 64,0 | KS-034-000 |
| 1" | 40 | 39,5 | 77,0 | KS-100-000 |
| 1 1/4" | 50 | 45,9 | 92,0 | KS-114-000 |
| 1 1/2" | 58 | 48,5 | 97,0 | KS-112-000 |
| 2" | 70 | 58,0 | 116,0 | KS-200-000 |

dostupné jakosti: 1.4408

Fitinky závitové > fitinky > PN 16/ 20 (ISO 4144) > odbočky > kříže

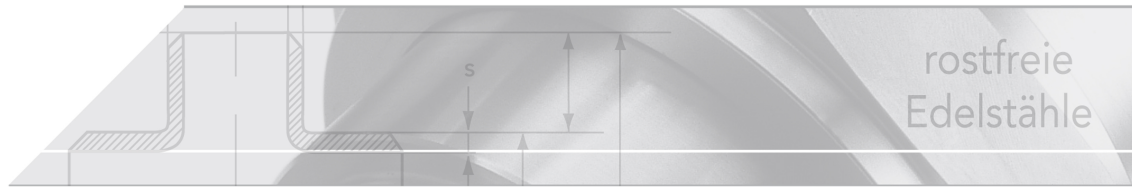

Cross

all sides socket connection

version

standard according to ISO 4144 ISO 4144

material AISI 316/ 1.4408 (V4A)

inspection certificate according to DIN EN 10204-3.1

cylindrical female thread according to DIN ISO 228-1 (code: G)

design

temperature*

-20 to 40 °C

100 °C

150 °C

200 °C

220 °C

pressure**

20 bar

16 bar

15 bar

14 bar

13 bar

* of the medium

** vibration-free max. operating pressure

