


plug, parallel thread ISO 4144

[short name: ST.228*](#)

hexagon head




technical product sheet

G	L	SW	Art.-Nr.
1/8"	17	12	ST-018-00Z
1/4"	18	16	ST-014-00Z
3/8"	18	20	ST-038-00Z
1/2"	25	24	ST-012-00Z
3/4"	26	30	ST-034-00Z
1"	29	38	ST-100-00Z
1 1/4"	35	46	ST-114-00Z
1 1/2"	38	52	ST-112-00Z
2"	39	65	ST-200-00Z
2 1/2"	44	81	ST-212-00Z
3"	54	94	ST-300-00Z
4"	55	119	ST-400-00Z

available material: 1.4408

Threaded fittings > fittings > PN 16/ 20 (ISO 4144) > caps/plugs > with parallel thread

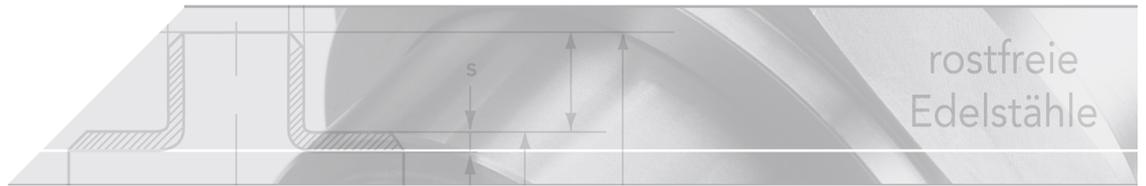

Plugs

made of stainless steel

version

standard according to ISO 4144

material AISI 316/ 1.4408 (V4A)

inspection certificate according to DIN EN 10204-3.1

cylindrical female thread according to DIN ISO 228-1 (code: G)

to DN 2" with 6-sided; starting with DN 2 1/2" with 8-sided

design

temperature*

-20 to 40 °C

100 °C

150 °C

200 °C

220 °C

pressure**

20 bar

16 bar

15 bar

14 bar

13 bar

* of the medium

** vibration-free max. operating pressure

