


round cap - ISO 4144

[short name: KA.R.I*](#)




technical product sheet

| G | H | D | Art.-Nr. |
|--------|------|-------|------------|
| 1/8" | 13,0 | 15,5 | KA-018-RUN |
| 1/4" | 16,5 | 19,0 | KA-014-RUN |
| 3/8" | 17,0 | 22,5 | KA-038-RUN |
| 1/2" | 21,5 | 27,0 | KA-012-RUN |
| 3/4" | 23,0 | 32,5 | KA-034-RUN |
| 1" | 26,5 | 40,0 | KA-100-RUN |
| 1 1/4" | 29,5 | 50,0 | KA-114-RUN |
| 1 1/2" | 29,5 | 56,5 | KA-112-RUN |
| 2" | 34,0 | 69,0 | KA-200-RUN |
| 2 1/2" | 39,0 | 86,5 | KA-212-RUN |
| 3" | 42,5 | 100,0 | KA-300-RUN |
| 4" | 49,0 | 126,0 | KA-400-RUN |

available material: 1.4408

Threaded fittings > fittings > PN 16/ 20 (ISO 4144) > caps/plugs > round caps

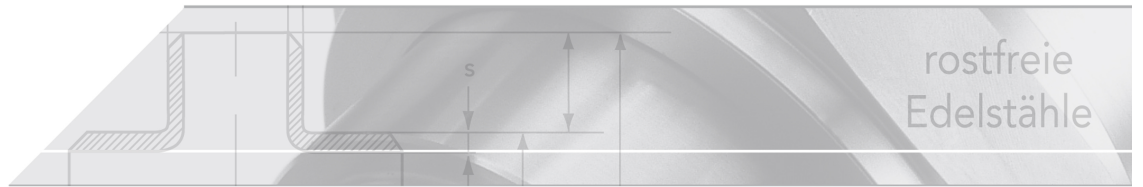

Round cap

made of stainless steel

version

standard according to ISO 4144

material AISI 316/ 1.4408 (V4A)

inspection certificate according to DIN EN 10204-3.1

cylindrical female thread according to DIN ISO 228-1 (code: G)

design

temperature*

-20 to 40 °C

100 °C

150 °C

200 °C

220 °C

pressure**

20 bar

16 bar

15 bar

14 bar

13 bar

* of the medium

** vibration-free max. operating pressure

