


šestihránné víčko - ISO 4144


[zkratka označení: KA.I*](#)


technický list výrobku

G	H	SW	Art.-Nr.
1/8"	13	15	KA-018-000
1/4"	17	18	KA-014-000
3/8"	19	21	KA-038-000
1/2"	22	27	KA-012-000
3/4"	24	30	KA-034-000
1"	25	38	KA-100-000
1 1/4"	28	50	KA-114-000
1 1/2"	28	55	KA-112-000
2"	34	70	KA-200-000
2 1/2"	40	92	KA-212-000
3"	45	109	KA-300-000
4"	50	132	KA-400-000

dostupné jakosti: 1.4408

Fitinky závitové > fitinky > PN 16/ 20 (ISO 4144) > víčka/zátky > šestihránná víčka

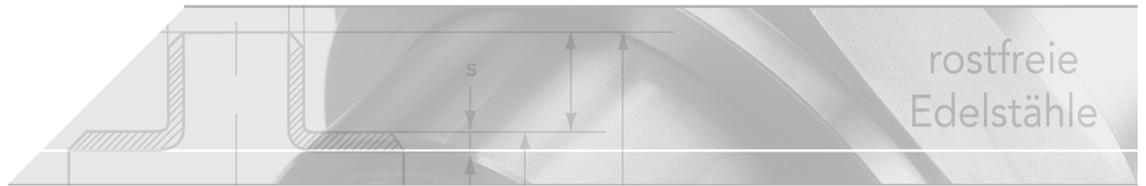

Cap

made of stainless steel

version

standard according to ISO 4144

material AISI 316/ 1.4408 (V4A)

inspection certificate according to DIN EN 10204-3.1

cylindrical female thread according to DIN ISO 228-1 (code: G)

to DN 2" with 6-sided; starting with DN 2 1/2" with 8-sided

design

temperature*

-20 to 40 °C

100 °C

150 °C

200 °C

220 °C

pressure**

20 bar

16 bar

15 bar

14 bar

13 bar

* of the medium

** vibration-free max. operating pressure

