


ball valve groove/groove

[short name: 726S*](#)

type 726S, 2-piece

full bore, with handle

>victaulic system<

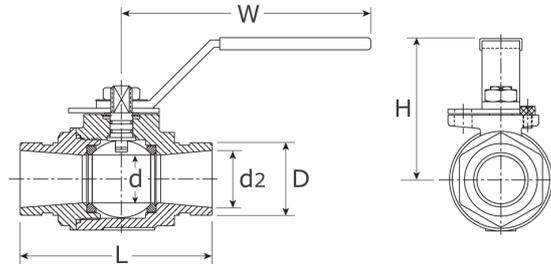


technical product sheet

Zoll	D	L	W	d	d2	H	PN	kg	Art.-Nr.
DN 1 1/2"	48,3	130	178	32	38	76	69	2,200	VIK2-048-000-4
DN 2"	60,3	140	178	38	51	86	69	3,060	VIK2-060-000-4
DN 3"	88,9	168	250	64	76	115	69	7,800	VIK2-088-000-4
DN 6"	168,3	257	459	102	152	165	55	37,200	VIK2-168-000-4

available material: ask

Systems > Victaulic > Standard Nutsystem > ball valves > 2-piece

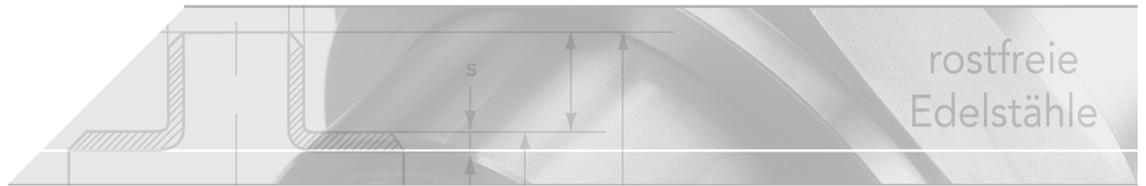

Victaulic ball valve

Typ 726S

Specification

full port

2-piece housing

flange plate according to ISO standard for mounting directly on actuator

shut-off device

pressure level: PN 69 (> DN 3" PN 50)

Part list

discription	material
housing	stainless steel, CF8M
threaded part	stainless steel, CF8M
ball	stainless steel, AISI 316
seat seal	TFE (Tetrafluoroethylene)
seals	Fluoroelastomer
hand lever	steel, galvanized
grip coating	plastic

