
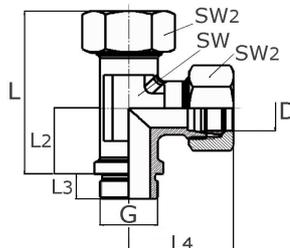


L šroubení s vnějším závitem

[zkratka označení: LE.G*](#)

DIN 2353, EN ISO 8434-1

Těsnící hrana B





technický list výrobku

Reihe	G	D	PN	L	L2	L3	SW	SW2	kg	Art.-Nr.
leicht	3/4"	22	160	53,5	26,0	44,0	27	36	0,000	2353-LE22LG06
leicht	1"	28	160	60,5	30,0	47,0	36	41	0,000	2353-LE28LG08
leicht	1 1/4"	35	160	68,5	34,0	51,5	41	50	0,000	2353-LE35LG10
leicht	1 1/2"	42	160	79,0	39,0	63,0	50	60	0,000	2353-LE42LG12
schwer	3/4"	20	400	52,5	26,0	48,0	27	36	0,000	2353-LE20SG06
schwer	1"	25	400	60,0	30,0	54,0	36	46	0,000	2353-LE25SG08
schwer	1 1/4"	30	400	69,5	34,0	62,0	41	50	0,000	2353-LE30SG10
schwer	1 1/2"	38	250	80,0	39,0	72,0	50	60	0,000	2353-LE38SG12

dostupné jakosti: na poptávku

Systémy > zářezné kroužky > T-šroubení > L s vnějším závitem > válč. závit DIN-ISO 228

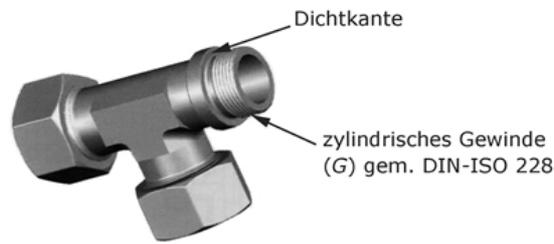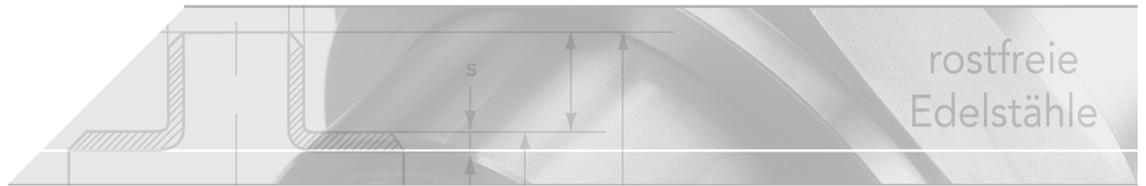

L-threaded connection made of stainless steel
DIN 2353, EN ISO 8341-1

Threaded studs Form B

DIN 3852 T2, ISO 1179-4

metallic seal due to seal edge

with cylindrical Whitworth-pipe thread ("G")

DIN-ISO 228 -T1 or BSP-thread

Nominal pressures PN

Series	Pipe OØ	PN
L (light)	6 - 15	250
	18 - 22	160
	28 - 42	100
S (heavy)	6 - 14	630
	16 - 25	400
	30 - 38	250

The nominal pressure is a commonly used rounded-off number referring to the pressure that is listed for static loads with a 3- or 4-fold safety margin.

Pressure deductions

Temperature	Pressure deduction
+50°C	4,5%
+100°C	11%
+200°C	20%
+300°C	29%
+400°C	33%

For seal materials such as FPM and Viton, the temperature limits of -25 to +200°C must be noted.

All values specified are guidelines that can also be influenced to a greater or lesser extent by the medium.

