nástrčné koleno 45°

lisovací fitinka, M profil

zkratka označení: N.06*




## technický list výrobku

| DW | Abnahme | Rohr-AD | L | h | z | Art.-Nr. |
|---|---|---|---|---|---|---|
| EPDM | DVGW | 15,0 | 35 | 47 | 15 | PRFI-EB-015-45-N |
| EPDM | DVGW | 18,0 | 36 | 49 | 16 | PRFI-EB-018-45-N |
| EPDM | DVGW | 22,0 | 41 | 52 | 20 | PRFI-EB-022-45-N |
| EPDM | DVGW | 28,0 | 46 | 58 | 24 | PRFI-EB-028-45-N |
| EPDM | DVGW | 35,0 | 50 | 61 | 24 | PRFI-EB-035-45-N |
| EPDM | DVGW | 42,0 | 57 | 70 | 27 | PRFI-EB-042-45-N |
| EPDM | DVGW | 54,0 | 67 | 76 | 33 | PRFI-EB-054-45-N |
| EPDM | DVGW | 76,1 | 111 | 128 | 58 | PRFI-EB-076-45-N |
| EPDM | DVGW | 88,9 | 114 | 135 | 56 | PRFI-EB-088-45-N |
| EPDM | DVGW | 108,0 | 138 | 169 | 64 | PRFI-EB-108-45-N |
| EPDM | DVGW | 139,7 | 203 | 210 | 105 | PRFI-EB-139-45-N |
| EPDM | DVGW | 168,3 | 252 | 253 | 134 | PRFI-EB-168-45-N |
| FKM | - | 15,0 | 35 | 47 | 15 | PRFI-EB-015-45-N-FKM |
| FKM | - | 18,0 | 36 | 49 | 16 | PRFI-EB-018-45-N-FKM |
| FKM | - | 22,0 | 41 | 52 | 20 | PRFI-EB-022-45-N-FKM |
| FKM | - | 28,0 | 46 | 58 | 24 | PRFI-EB-028-45-N-FKM |
| FKM | - | 35,0 | 50 | 61 | 24 | PRFI-EB-035-45-N-FKM |
| FKM | - | 42,0 | 57 | 70 | 27 | PRFI-EB-042-45-N-FKM |
| FKM | - | 54,0 | 67 | 76 | 33 | PRFI-EB-054-45-N-FKM |
| FKM | - | 76,1 | 111 | 128 | 58 | PRFI-EB-076-45-N-FKM |
| FKM | - | 88,9 | 114 | 135 | 56 | PRFI-EB-088-45-N-FKM |
| FKM | - | 108,0 | 138 | 169 | 64 | PRFI-EB-108-45-N-FKM |

dostupné jakosti: 316L

Systeme › Pressfittings › Bogen › zum Einstecken › 45°

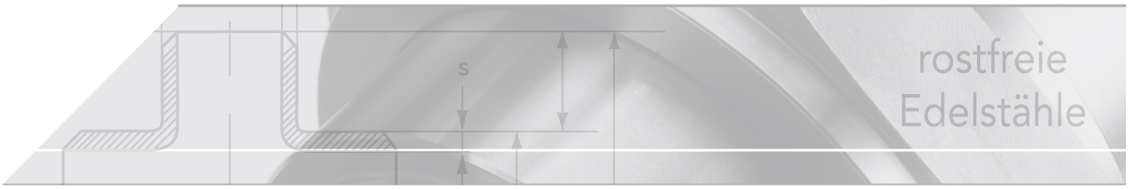

**NUMEPRESS**

Stainless steel press-system

| Properties |
|---|
| Unsolvable press connection acc. to EN 10088 |
| M profile, system independent |
| Nominal pressure for water applications max. 16 bar |
| Stainless steel 1.4404 (AISI 316L) |
| DVGW-approval for water |
| ÖVGW-certificate for water installations |
| SVGW SSIGE – certificate for water distribution systems |
| FM APPROVED |

Gaskets

| Material | Colour | Application | Temperature |
|---|---|---|---|
| EPDM | black | water | -20° - +110° C |
| FKM | green | solar, oil, compressed ai | -30° - +180° C |
| FPM | red | steam | -20° - +200° C |