


přechodový oblouk 90° - Ig

[zkratka označení: N.07\\*](#)

lisovací fitinka, M profil

povolení DVGW pro pitnou vodu

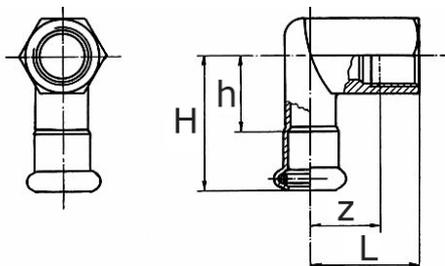


### technický list výrobku

| Rohr-AD | Rp     | H    | h    | L    | z    | DW   | Abnahme |
|---------|--------|------|------|------|------|------|---------|
| 15,0    | 1/2"   | 57,0 | 37,0 | 37,0 | 24,0 | EPDM | DVGW    |
| 15,0    | 1/2"   | 57,0 | 37,0 | 37,0 | 24,0 | FKM  | -       |
| 18,0    | 1/2"   | 57,0 | 37,0 | 39,0 | 26,0 | EPDM | DVGW    |
| 18,0    | 1/2"   | 57,0 | 37,0 | 39,0 | 26,0 | FKM  | -       |
| 18,0    | 3/4"   | 59,0 | 39,0 | 46,0 | 31,0 | EPDM | DVGW    |
| 18,0    | 3/4"   | 59,0 | 39,0 | 46,0 | 31,0 | FKM  | -       |
| 22,0    | 3/4"   | 59,0 | 39,0 | 46,0 | 31,0 | EPDM | DVGW    |
| 22,0    | 3/4"   | 59,0 | 39,0 | 46,0 | 31,0 | FKM  | -       |
| 28,0    | 1"     | 67,0 | 44,0 | 54,0 | 37,0 | EPDM | DVGW    |
| 28,0    | 1"     | 67,0 | 44,0 | 54,0 | 37,0 | FKM  | -       |
| 35,0    | 1 1/4" | 75,0 | 49,0 | 63,0 | 44,0 | EPDM | DVGW    |
| 35,0    | 1 1/4" | 75,0 | 49,0 | 63,0 | 44,0 | FKM  | -       |

dostupné jakosti: 316L

Systeme > Pressfittings > Bogen > Winkel > Innengewinde

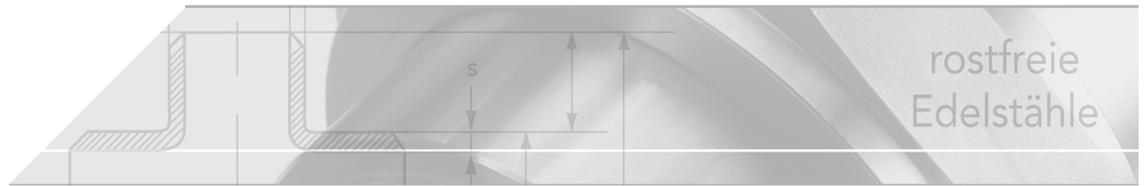

## NUMEPRESS

Stainless steel press-system

### Properties

Unsolvable press connection acc. to EN 10088

M profile, system independent

Nominal pressure for water applications max. 16 bar

Stainless steel 1.4404 (AISI 316L)

Female thread acc. to DIN EN 10226

DVGW-approval for water

ÖVGW-certificate for water installations

SVGW SSI GE - certificate for water distribution systems

FM APPROVED

### Gaskets

| Material | Colour | Application               | Temperature    |
|----------|--------|---------------------------|----------------|
| EPDM     | black  | water                     | -20° - +110° C |
| FKM      | green  | solar, oil, compressed ai | -30° - +180° C |
| FPM      | red    | steam                     | -20° - +200° C |

