


female angle adaptor
press fitting, M profile
DVGW-approval for water

[short name: N.07*](#)

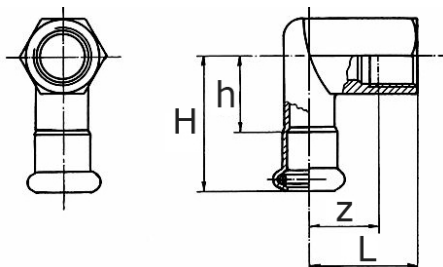


technical product sheet

Rohr-AD	Rp	H	h	L	z	DW	Abnahme
15,0	1/2"	57,0	37,0	37,0	24,0	EPDM	DVGW
15,0	1/2"	57,0	37,0	37,0	24,0	FKM	-
18,0	1/2"	57,0	37,0	39,0	26,0	EPDM	DVGW
18,0	1/2"	57,0	37,0	39,0	26,0	FKM	-
18,0	3/4"	59,0	39,0	46,0	31,0	EPDM	DVGW
18,0	3/4"	59,0	39,0	46,0	31,0	FKM	-
22,0	3/4"	59,0	39,0	46,0	31,0	EPDM	DVGW
22,0	3/4"	59,0	39,0	46,0	31,0	FKM	-
28,0	1"	67,0	44,0	54,0	37,0	EPDM	DVGW
28,0	1"	67,0	44,0	54,0	37,0	FKM	-
35,0	1 1/4"	75,0	49,0	63,0	44,0	EPDM	DVGW
35,0	1 1/4"	75,0	49,0	63,0	44,0	FKM	-

available material: 316L

Systeme > Pressfittings > Bogen > Winkel > Innengewinde

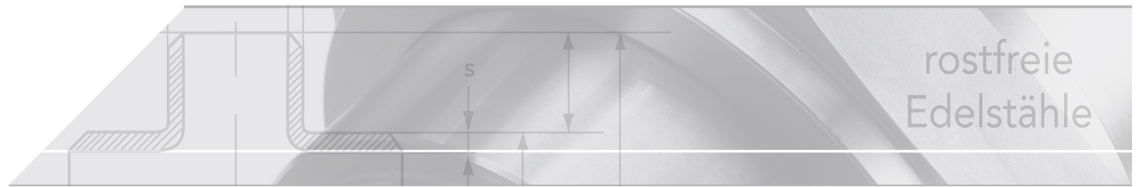

NUMEPRESS

Stainless steel press-system

Properties

Unsolvable press connection acc. to EN 10088

M profile, system independent

Nominal pressure for water applications max. 16 bar

Stainless steel 1.4404 (AISI 316L)

Female thread acc. to DIN EN 10226

DVGW-approval for water

ÖVGW-certificate for water installations

SVGW SSIGE - certificate for water distribution systems

FM APPROVED

Gaskets

Material	Colour	Application	Temperature
EPDM	black	water	-20° - +110° C
FKM	green	solar, oil, compressed ai	-30° - +180° C
FPM	red	steam	-20° - +200° C

