


FF pipe bridge

press sleeve on both ends

DVGW-approval for water

[short name: N.25*](#)

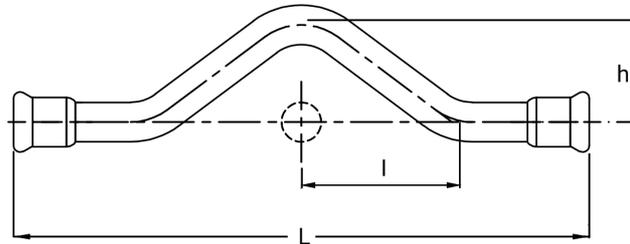


[technical product sheet](#)

Rohr-AD	L	I	H	Art.-Nr.
15,0	202	65	38	PRFI-ÜS-015-N-25
18,0	236	68	43	PRFI-ÜS-018-N-25
22,0	233	68	40	PRFI-ÜS-022-N-25
28,0	303	93	64	PRFI-ÜS-028-N-25

available material: 316L

Systeme > Pressfittings > Bogen > Pass-/ Sprungbogen > Überbogen, Muffen

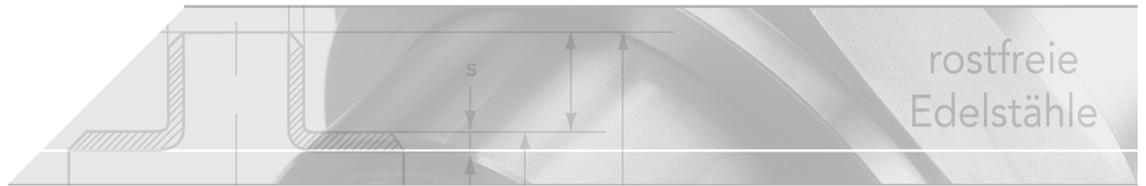

NUMEPRESS

Stainless steel press-system

Properties

Unsolvable press connection acc. to EN 10088

M profile, system independent

Nominal pressure for water applications max. 16 bar

Stainless steel 1.4404 (AISI 316L)

DVGW-approval for water

ÖVGW-certificate for water installations

SVGW SSIIG - certificate for water distribution systems

FM APPROVED

Gaskets

Material	Colour	Application	Temperature
EPDM	black	water	-20° - +110° C
FKM	green	solar, oil, compressed ai	-30° - +180° C
FPM	red	steam	-20° - +200° C

