SS ball valve press x press

short name: N.31*

M profile, 3 PCS

DVGW-approval for water



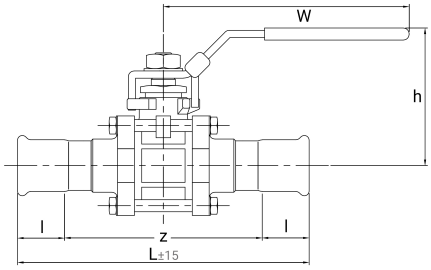

technical product sheet

Rohr-AD	L	l	z	h	W	DW	Abnahme
15,0	111	20	71,0	63	110	EPDM	DVGW
15,0	111	20	71,0	63	110	FKM	-
18,0	111	20	71,0	63	110	EPDM	DVGW
18,0	111	20	71,0	63	110	FKM	-
22,0	130	21	91,0	68	130	EPDM	DVGW
22,0	130	21	91,0	68	130	FKM	-
28,0	141	22	97,0	70	141	EPDM	DVGW
28,0	141	22	97,0	70	141	FKM	-
35,0	159	26	107,0	85	159	EPDM	DVGW
35,0	159	26	107,0	85	159	FKM	-
42,0	180	30	120,0	90	180	EPDM	DVGW
42,0	180	30	120,0	90	180	FKM	-
54,0	203	34	135,0	100	203	EPDM	DVGW
54,0	203	34	135,0	100	203	FKM	-
76,1	289	54	181,0	145	289	EPDM	DVGW
76,1	289	54	181,0	145	289	FKM	-
88,9	340	58	224,0	155	340	EPDM	DVGW
88,9	340	58	224,0	155	340	FKM	-
108,0	424	69	286,0	170	424	EPDM	DVGW
108,0	424	69	286,0	170	424	FKM	-

available material: 316L

Systeme › Pressfittings › Kugelhähne › Pressmuffen

NUMEPRESS

Stainless steel press-system

Properties
Unsolvable press connection acc. to EN 10088
M profile, system independent
Nominal pressure for water applications max. 16 bar
Stainless steel 1.4404 (AISI 316L)
3-part construction, housing gasket
DVGW-approval for water
ÖVGW-certificate for water installations
SVGW SSIGE – certificate for water distribution systems
FM APPROVED

Gaskets

Material	Colour	Application	Temperature
EPDM	black	water	-20° - +110° C
FKM	green	solar, oil, compressed ai	-30° - +180° C
FPM	red	steam	-20° - +200° C