


přechodové koleno 90° - Ag

[zkratka označení: N.39*](#)

lisovací fitinka, M profil

povolení DVGW pro pitnou vodu




technický list výrobku

DW	Abnahme	Rohr-AD	R	L	z	A
EPDM	DVGW	15,0	3/8"	48,0	28	53
EPDM	DVGW	15,0	1/2"	48,0	28	49
EPDM	DVGW	18,0	1/2"	52,0	32	57
EPDM	DVGW	18,0	3/4"	52,0	32	61
EPDM	DVGW	22,0	3/4"	61,0	40	68
EPDM	DVGW	28,0	1"	71,5	59	81
EPDM	DVGW	35,0	1 1/4"	86,0	60	96
EPDM	DVGW	42,0	1 1/2"	95,5	82	121
EPDM	DVGW	54,0	2"	105,2	72	112
FKM	-	15,0	3/8"	48,0	28	53
FKM	-	15,0	1/2"	48,0	28	49
FKM	-	18,0	1/2"	52,0	32	57
FKM	-	18,0	3/4"	52,0	32	61
FKM	-	22,0	3/4"	61,0	40	68
FKM	-	28,0	1"	71,5	59	81
FKM	-	35,0	1 1/4"	86,0	60	96
FKM	-	42,0	1 1/2"	112,0	82	121
FKM	-	54,0	2"	105,2	72	112

dostupné jakosti: 316L

Systeme > Pressfittings > Bogen > mit Gewinde > 90° mit AG

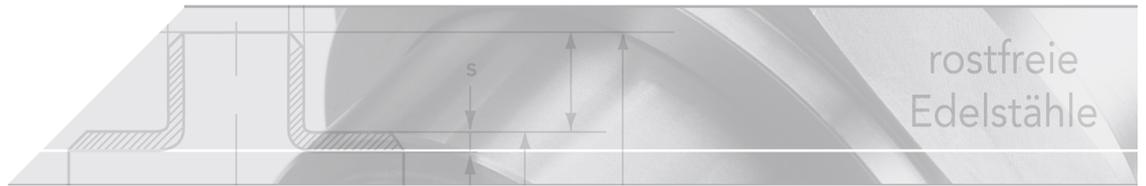

NUMEPRESS

Stainless steel press-system

Properties

Unsolvable press connection acc. to EN 10088

M profile, system independent

Nominal pressure for water applications max. 16 bar

Stainless steel 1.4404 (AISI 316L)

Male thread, conical acc. to DIN EN 10226/ ISO 7/1

DVGW-approval for water

ÖVGW-certificate for water installations

SVGW SSI GE - certificate for water distribution systems

FM APPROVED

Gaskets

Material	Colour	Application	Temperature
EPDM	black	water	-20° - +110° C
FKM	green	solar, oil, compressed ai	-30° - +180° C
FPM	red	steam	-20° - +200° C

