
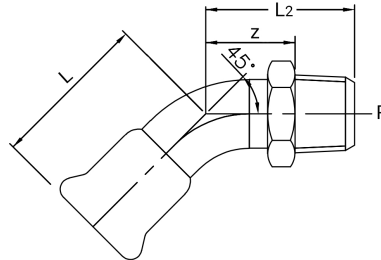


45° male angle adaptor  
press fitting, M profile  
DVGW-approval for water

[short name: N.33\\*](#)




### technical product sheet

Rohr-AD	R	L	L2	z	DW	Abnahme
15,0	1/2"	40,0	35	14	EPDM	DVGW
15,0	1/2"	40,0	35	14	FKM	-
18,0	1/2"	41,5	36	16	EPDM	DVGW
18,0	1/2"	41,5	36	16	FKM	-
18,0	3/4"	45,5	36	16	EPDM	DVGW
18,0	3/4"	45,5	36	16	FKM	-
22,0	3/4"	48,5	41	20	EPDM	DVGW
22,0	3/4"	48,5	41	20	FKM	-
28,0	1"	56,0	46	24	EPDM	DVGW
28,0	1"	56,0	46	24	FKM	-

available material: ask

Systeme > Pressfittings > Bogen > mit Gewinde > 45° mit AG

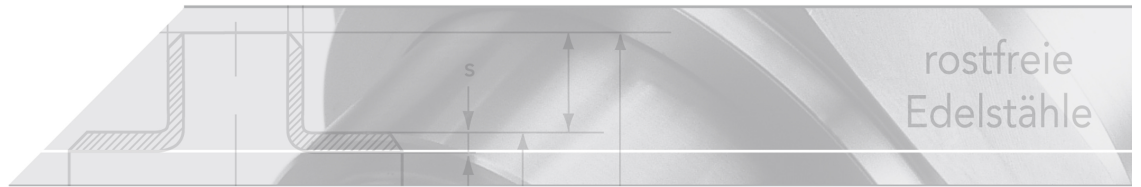

## NUMEPRESS

Stainless steel press-system

### Properties

Unsolvable press connection acc. to EN 10088

M profile, system independent

Nominal pressure for water applications max. 16 bar

Stainless steel 1.4404 (AISI 316L)

Male thread, conical acc. to DIN EN 10226/ ISO 7/1

DVGW-approval for water

ÖVGW-certificate for water installations

SVGW SSI GE - certificate for water distribution systems

FM APPROVED

### Gaskets

Material	Colour	Application	Temperature
EPDM	black	water	-20° - +110° C
FKM	green	solar, oil, compressed ai	-30° - +180° C
FPM	red	steam	-20° - +200° C

